

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 1 058 484 A1

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
06.12.2000 Bulletin 2000/49

(51) Int Cl.7: H05B 33/22, H01L 27/15,  
H01L 27/00

(21) Application number: 00112032.8

(22) Date of filing: 02.06.2000

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

- Koyama, Jun  
Atsugi-shi, Kanagawa-ken 243-0036 (JP)
- Yamamoto, Kunitaka  
Atsugi-shi, Kanagawa-ken 243-0036 (JP)
- Konuma, Toshimitsu  
Atsugi-shi, Kanagawa-ken 243-0036 (JP)

(30) Priority: 04.06.1999 JP 15880999

(71) Applicant: SEMICONDUCTOR ENERGY  
LABORATORY CO., LTD.  
Atsugi-shi Kanagawa-ken 243-0036 (JP)

(74) Representative: Grünecker, Kinkeldey,  
Stockmair & Schwanhäusser Anwaltssozietät  
Maximilianstrasse 58  
80538 München (DE)

(72) Inventors:  
• Yamazaki, Shunpei  
Atsugi-shi, Kanagawa-ken 243-0036 (JP)

### (54) Electro-optical device with an insulating layer

(57) An object of the present invention is to provide an EL display device, which has a high operating performance and reliability.

A third passivation film 45 is disposed under an EL element 203 which comprises a pixel electrode (anode) 46, an EL layer 47 and a cathode 48, to make a structure in which heat generated by the EL element 203 is radiated. Further, the third passivation film 45 prevents alkali metals within the EL element 203 from diffusing into the TFTs side, and prevents moisture and oxygen of the TFTs side from penetrating into the EL element 203. More preferably, heat radiating effect is given to a fourth passivation film 50 to make the EL element 203 to be enclosed by heat radiating layers.

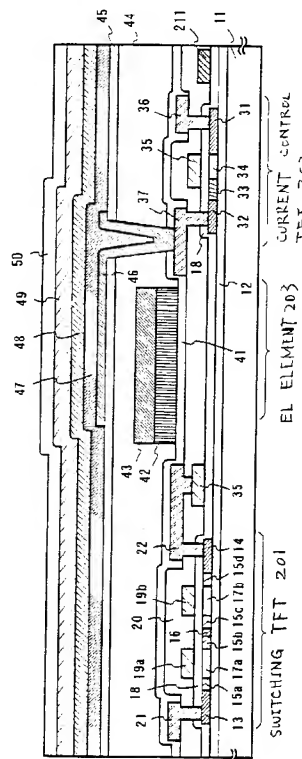


Fig. 1

EP 1 058 484 A1

**Description****BACKGROUND OF THE INVENTION**

## 1. Field of the Invention

[0001] The present invention relates to an electro-optical device, typically an EL (electroluminescence) display device formed by a semiconductor element (an element using a semiconductor thin film) made on a substrate, and to electronic equipment (an electronic device) having the electro-optical device as a display (also referred to as a display portion).

## 2. Description of the Related Art

[0002] Techniques of forming a TFT on a substrate have been widely progressing in recent years, and developments of applications to an active matrix type display device are advancing. In particular, a TFT using a polysilicon film has a higher electric field effect mobility (also referred to as mobility) than a TFT using a conventional amorphous silicon film, and high speed operation is therefore possible. As a result, it becomes possible to perform pixel control, conventionally performed by a driver circuit external to the substrate, by a driver circuit formed on the same substrate as the pixel.

[0003] This type of active matrix display device has been in the spotlight because of the many advantage which can be obtained by incorporating various circuits and elements on the same substrate in this type of active matrix display device, such as reduced manufacturing cost, small size, increased yield, and higher throughput.

[0004] An EL layer (light emitting layer) is made to emit light in an active matrix EL display device by disposing a switching element formed from a TFT to each pixel, and by driving a driver element that performs current control by the switching element. For example, there are EL display devices disclosed in U.S. Patent Number 5,684,365 (Japanese Patent Application Laid-Open No. Hei 8-234683) and Japanese Patent Application Laid-Open No. Hei 10-189252.

[0005] Degradation of EL materials due to moisture has been a problem in these EL display devices. Specifically organic EL materials degrade not only by moisture but also by oxygen. Accordingly EL elements are generally shielded from moisture, etc., by sealing the EL elements as disclosed in Japanese Patent Application Laid-Open No. Hei 8-78159.

[0006] However, the problem that the EL layer has is not limited to moisture. The EL layer includes alkaline metals such as sodium (Na) in itself, and a serious trouble can be caused to the operation of TFTs when the alkali metals are diffused into the TFTs. Further, degradation due to storage of heat is also a problem because an EL layer is weak to heat. Note that alkaline metals are referred to 'alkaline metals' to include alkali earth metals through the Specification.

**SUMMARY OF THE INVENTION**

[0007] In view of the above conventional technique, an object of the present invention is to provide an electro-optical device having good operation performance and high reliability, and in particular, to provide an EL display device. Another object of the present invention is to increase the quality of electronic equipment (an electronic device) having the electro-optical device as a display by increasing the image quality of the electro-optical device.

[0008] In order to achieve the above objects, degradation of EL elements due to moisture, degradation due to heat and release of alkaline metals are prevented in the present invention. In concrete, an insulating film which satisfies these is disposed in contact with the EL elements, or more preferably the EL elements are enclosed by such insulating films.

[0009] Namely, an insulating film, which has a blocking effect of moisture and alkaline metals, and a heat radiating effect is disposed to a nearest position to the EL elements, and degradation of the EL elements is suppressed by the insulating film.

[0010] Note that a laminate of an insulating film having blocking effect against moisture and alkaline metals and an insulating film having heat radiating effect can be used in case that such insulating film cannot be used by a single layer. Further, it is possible to use laminate of an insulating film having blocking effect against moisture, an insulating film having blocking effect against alkaline metals and an insulating film having heat radiating effect.

[0011] In either way, measures against both of moisture and heat should be sought in order to suppress degradation of the EL layer (it may also be referred to as degradation of EL element), and it is necessary to take measures against heat, moisture and alkaline metals for the TFTs themselves that driver the EL elements.

**BRIEF DESCRIPTION OF THE DRAWINGS**

[0012] In the accompanying drawings:

Fig. 1 is a diagram showing the cross sectional structure of the pixel portion of an EL display device;  
 Figs. 2A and 2B are diagrams showing the top view and the composition, respectively, of the pixel portion of an EL display device;  
 Figs. 3A to 3E are diagrams showing manufacturing processes of an active matrix type EL display device;  
 Figs. 4A to 4D are diagrams showing manufacturing processes of an active matrix type EL display device;  
 Figs. 5A to 5C are diagrams showing manufacturing processes of an active matrix type EL display device;  
 Fig. 6 is a diagram showing an external view of an EL module;  
 Fig. 7 is a diagram showing the circuit block structure of an EL display device;  
 Fig. 8 is an enlarged diagram of the pixel portion of an EL display device;  
 Fig. 9 is a diagram showing the element structure of a sampling circuit of an EL display device;  
 Fig. 10 is a diagram showing the composition of the pixel portion of an EL display device;  
 Fig. 11 is a diagram showing the cross sectional structure of an EL display device;  
 Figs. 12A and 12B are diagrams showing the top view and the composition, respectively, of the pixel portion of an EL display device;  
 Fig. 13 is a diagram showing the cross sectional structure of the pixel portion of an EL display device;  
 Fig. 14 is a diagram showing the cross sectional structure of the pixel portion of an EL display device;  
 Figs. 15A and 15B are diagrams showing the top view and the composition, respectively, of the pixel portion of an EL display device;  
 Figs. 16A to 16F are diagrams showing specific examples of electronic equipment;  
 Figs. 17A and 17B are diagrams showing external views of an EL module;  
 Figs. 18A to 18C are diagrams showing manufacturing processes of a contact structure;  
 Fig. 19 is a diagram showing the laminate structure of an EL layer;  
 Figs. 20A and 20B are diagrams showing specific examples of electronic equipment;  
 Figs. 21A and 21B are diagrams showing the circuit composition of the pixel portion of an EL display device;  
 Figs. 22A and 22B are diagrams showing the circuit composition of the pixel portion of an EL display device; and  
 Fig. 23 is a diagram showing the cross sectional structure of the pixel portion of an EL display device.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

##### Embodiment mode

**[0013]** Figs. 1 to 2B are used in explaining the preferred embodiments of the present invention. Shown in Fig. 1 is a cross sectional diagram of a pixel of an EL display device of the present invention, in Fig. 2A is its top view, and in Fig. 2B is a circuit composition. In practice, a pixel portion (image display portion) is formed with a multiple number of this type of pixel arranged in a matrix state.

**[0014]** Note that the cross sectional diagram of Fig. 1 shows a cross section cut along the line A-A' in the top view shown in Fig. 2A. Common symbols are used in Fig. 1 and in Figs. 2A and 2B, and therefore the three figures may be referenced as appropriate. Furthermore, two pixels are shown in the top view of Fig. 2A, and both have the same structure.

**[0015]** Reference numeral 11 denotes a substrate, and reference numeral 12 denotes a base film in Fig. 1. A glass substrate, a glass ceramic substrate, a quartz substrate, a silicon substrate, a ceramic substrate, a metallic substrate, or a plastic substrate (including a plastic film) can be used as the substrate 11.

**[0016]** Further, the base film 12 is especially effective for cases in which a substrate containing mobile ions, or a substrate having conductivity, is used, but need not be formed for a quartz substrate. An insulating film containing silicon may be formed as the base film 12. Note that the term "insulating film containing silicon" indicates, specifically, an insulating film that contains silicon, oxygen, and nitrogen in predetermined ratios such as a silicon oxide film, a silicon nitride film, or a silicon oxynitride film (denoted by  $\text{SiO}_x\text{N}_y$ ).

**[0017]** Note that it is also effective to prevent degradation of TFTs or EL elements by giving heat radiating effect to the base film 12 and radiate heat generated from TFTs. All known materials can be used for giving heat radiating effect.

**[0018]** Two TFTs are formed within the pixel here. Reference numeral 201 denotes a TFT functioning as a switching element (hereafter referred to as a switching TFT), and reference numeral 202 denotes a TFT functioning as a current control element for controlling the amount of current flowing to an EL element (hereafter referred to as a current control TFT), and both are formed by an n-channel TFT.

**[0019]** The field effect mobility of the n-channel TFT is larger than the field effect mobility of a p-channel TFT, and therefore the operation speed is fast and electric current can flow easily. Further, even with the same amount of current flow, the n-channel TFT can be made smaller. The effective surface area of the display portion therefore becomes larger when using the n-channel TFT as a current control TFT, and this is preferable.

**[0020]** The p-channel TFT has the advantages that hot carrier injection essentially does not become a problem, and

that the off current value is low, and there are already reports of examples of using the p-channel TFT as a switching TFT and as a current control TFT. However, by using a structure in which the position of an LDD region differs, the problems of hot carrier injection and the off current value in the n-channel TFT are solved by the present invention. The present invention is characterized by the use of n-channel TFTs for all of the TFTs within all of the pixels.

**[0021]** Note that it is not necessary to limit the switching TFT and the current control TFT to n-channel TFTs in the present invention, and that it is possible to use p-channel TFTs for either the switching TFT, the current control TFT, or both.

**[0022]** The switching TFT 201 is formed having: an active layer comprising a source region 13, a drain region 14, LDD regions 15a to 15d, a high concentration impurity region 16, and channel forming regions 17a and 17b; a gate insulating film 18; gate electrodes 19a and 19b, a first interlayer insulating film 20, a source wiring 21, and a drain wiring 22.

**[0023]** As shown in Fig. 2A, the gate electrodes 19a and 19b become a double gate structure electrically connected by a gate wiring 211 which is formed by a different material (a material having a lower resistance than the gate electrodes 19a and 19b). Of course, not only a double gate structure, but a so-called multi-gate structure (a structure containing an active layer having two or more channel forming regions connected in series), such as a triple gate structure, may also be used. The multi-gate structure is extremely effective in lowering the value of the off current, and by making the switching TFT 201 of the pixel into a multi-gate structure with the present invention, a low off current value can be realized for the switching TFT.

**[0024]** The active layer is formed by a semiconductor film containing a crystal structure. In other words, a single crystal semiconductor film may be used, and a polycrystalline semiconductor film or a microcrystalline semiconductor film may also be used. Further, the gate insulating film 18 may be formed by an insulating film containing silicon. Additionally, a conducting film can be used for all of the gate electrodes, the source wiring, and the drain wiring.

**[0025]** In addition, the LDD regions 15a to 15d in the switching TFT 201 are formed so as not to overlay with the gate electrodes 19a and 19b by interposing the gate insulating film 18. This structure is extremely effective in reducing the off current value.

**[0026]** Note that the formation of an offset region (a region that comprises a semiconductor layer having the same composition as the channel forming regions, and to which a gate voltage is not applied) between the channel forming regions and the LDD regions is more preferable for reducing the off current value. Further, when a multi-gate structure having two or more gate electrodes is used, the high concentration impurity region formed between the channel forming regions is effective in lowering the value of the off current.

**[0027]** By thus using the multi-gate structure TFT as the switching TFT 201, as above, a switching element having a sufficiently low off current value is realized by the present invention. The gate voltage of the current control TFT can therefore be maintained for a sufficient amount of time (for a period from one selection until the next selection) without forming a capacitor, such as the one stated in the Fig. 2 of Japanese Patent Application Laid-Open No. 10-189252.

**[0028]** Namely, it becomes possible to eliminate the capacitor which causes a reduction in the effective luminescence surface area, and it becomes possible to increase the effective luminescence surface area. This means that the image quality of the EL display device can be made brighter.

**[0029]** Next, the current control TFT 202 is formed having: an active layer comprising a source region 31, a drain region 32, an LDD region 33, and a channel forming region 34; a gate insulating film 18; a gate electrode 35; the first interlayer insulating film 20; a source wiring 36; and a drain wiring 37. Note that the gate electrode 35 has a single gate structure, but a multi-gate structure may also be used.

**[0030]** As shown in Figs. 2A and 2B, the drain of the switching TFT 201 is electrically connected to the gate of the current control TFT 202. Specifically, the gate electrode 35 of the current control TFT 202 is electrically connected to the drain region 14 of the switching TFT 201 through the drain wiring (also referred to as a connection wiring) 22. Further, the source wiring 36 is connected to an electric current supply wiring 212.

**[0031]** A characteristic of the current control TFT 202 is that its channel width is larger than the channel width of the switching TFT 201. Namely, as shown in Fig. 8, when the channel length of the switching TFT is taken as  $L1$  and its channel width as  $W1$ , and the channel length of the current control TFT is taken as  $L2$  and its channel width as  $W2$ , a relational expression is reached in which  $W2 / L2 \geq 5 \times W1 / L1$  (preferably  $W2 / L2 \geq 10 \times W1 / L1$ ). Consequently, it is possible for more current to easily flow in the current control TFT than in the switching TFT.

**[0032]** Note that the channel length  $L1$  of the multi-gate structure switching TFT is the sum of each of the channel lengths of the two or more channel forming regions formed. A double gate structure is formed in the case of Fig. 8, and therefore the sum of the channel lengths  $L1a$  and  $L1b$ , respectively, of the two channel-forming regions becomes the channel length  $L1$  of the switching TFT.

**[0033]** The channel lengths  $L1$  and  $L2$ , and the channel widths  $W1$  and  $W2$  are not specifically limited to a range of values with the present invention, but it is preferable that  $W1$  be from 0.1 to 5  $\mu\text{m}$  (typically between 1 and 3  $\mu\text{m}$ ), and that  $W2$  be from 0.5 to 30  $\mu\text{m}$  (typically between 2 and 10  $\mu\text{m}$ ). It is preferable that  $L1$  be from 0.2 to 18  $\mu\text{m}$  (typically between 2 and 15  $\mu\text{m}$ ), and that  $L2$  be from 0.1 to 50  $\mu\text{m}$  (typically between 1 and 20  $\mu\text{m}$ ) at this time.

[0034] Note that it is preferable to set the channel length  $L$  in the current control TFT on the long side in order to prevent excessive current flow. Preferably,  $W_2 / L_2 \geq 3$  (more preferably  $W_2 / L_2 \geq 5$ ). It is also preferable that the current flow per pixel is from 0.5 to 2  $\mu\text{A}$  (better between 1 and 1.5  $\mu\text{A}$ ).

[0035] By setting the numerical values within this range, all standards, from an EL display device having a VGA class number of pixels ( $640 \times 480$ ) to an EL display device having a high vision class number of pixels ( $1920 \times 1080$ ) can be included.

[0036] Furthermore, the length (width) of the LDD region formed in the switching TFT 201 is set from 0.5 to 3.5  $\mu\text{m}$ , typically between 2.0 and 2.5  $\mu\text{m}$ .

[0037] The EL display device shown in Fig. 1 is characterized in that the LDD region 33 is formed between the drain region 32 and the channel forming region 34 in the current control TFT 202. In addition, the LDD region 33 has both a region which overlaps, and a region which does not overlap the gate electrode 35 by interposing a gate insulating film 18.

[0038] The current control TFT 202 supplies a current for making the EL element 203 luminesce, and at the same time controls the amount supplied and makes gray scale display possible. It is therefore necessary that there is no deterioration when the current flows, and that steps are taken against deterioration due to hot carrier injection. Furthermore, when black is displayed, the current control TFT 202 is set in the off state, but if the off current value is high, then a clean black color display becomes impossible, and this invites problems such as a reduction in contrast. It is therefore necessary to suppress the value of the off current.

[0039] Regarding deterioration due to hot carrier injection, it is known that a structure in which the LDD region overlaps the gate electrode is extremely effective. However, if the entire LDD region is made to overlap the gate electrode, then the value of the off current rises, and therefore the applicant of the present invention resolves both the hot carrier and off current value countermeasures at the same time by a novel structure in which an LDD region which does not overlap the gate electrode is formed in series.

[0040] The length of the LDD region which overlaps the gate electrode may be made from 0.1 to 3  $\mu\text{m}$  (preferable between 0.3 and 1.5  $\mu\text{m}$ ) at this point. If it is too long, then the parasitic capacitance will become larger, and if it is too short, then the effect of preventing hot carrier will become weakened. Further, the length of the LDD region not overlapping the gate electrode may be set from 1.0 to 3.5  $\mu\text{m}$  (preferable between 1.5 and 2.0  $\mu\text{m}$ ). If it is too long, then a sufficient current becomes unable to flow, and if it is too short, then the effect of reducing off current value becomes weakened.

[0041] A parasitic capacitance is formed in the above structure in the region where the gate electrode and the LDD region overlap, and therefore it is preferable that this region not be formed between the source region 31 and the channel forming region 34. The carrier (electrons in this case) flow direction is always the same for the current control TFT, and therefore it is sufficient to form the LDD region on only the drain region side.

[0042] Further, looking from the viewpoint of increasing the amount of current that is able to flow, it is effective to make the film thickness of the active layer (especially the channel forming region) of the current control TFT 202 thick (preferably from 50 to 100 nm, more preferably between 60 and 80 nm). Conversely, looking from the point of view of making the off current value smaller for the switching TFT 201, it is effective to make the film thickness of the active layer (especially the channel forming region) thin (preferably from 20 to 50 nm, more preferably between 25 and 40 nm).

[0043] Next, reference numeral 41 denotes a first passivation film, and its film thickness may be set from 10 nm to 1  $\mu\text{m}$  (preferably between 200 and 500 nm). An insulating film containing silicon (in particular, preferably a silicon oxynitride film or a silicon nitride film) can be used as the passivation film material. The passivation film 41 plays the role of protecting the manufactured TFT from alkaline metals and moisture. Alkaline metals such as sodium are contained in an EL layer formed on the final TFT. In other words, the first passivation film 41 works as a protecting layer so that these alkaline metals (mobile ions) do not penetrate into the TFT. Note that alkaline metals and alkaline-earth metals are contained in the term 'alkaline metal' throughout this specification.

[0044] Further, by making the passivation film 41 possess a heat radiation effect, it is also effective in preventing thermal degradation of the EL layer. Note that light is emitted from the base 11 side in the Fig. 1 structure of the EL display device, and therefore it is necessary for the passivation film 41 to have light transmitting characteristics. Further, it is preferable not to use an insulating film which is apt to release oxygen in the case of using an organic material as the EL layer because it degrades by bonding with oxygen.

[0045] An insulating film comprising at least one element selected from the group consisting of B (boron), C (carbon), and N (nitrogen), and at least one element selected from the group consisting of Al (aluminum), Si (silicon), and P (phosphorous) can be given as a light transparent material possessing heat radiation qualities (having high heat conductivity). For example, it is possible to use: an aluminum nitride compound, typically aluminum nitride ( $\text{Al}_x\text{N}_y$ ); a silicon carbide compound, typically silicon carbide ( $\text{Si}_x\text{C}_y$ ); a silicon nitride compound, typically silicon nitride ( $\text{Si}_x\text{N}_y$ ); a boron nitride compound, typically boron nitride ( $\text{B}_x\text{N}_y$ ); or a boron phosphate compound, typically boron phosphate ( $\text{B}_x\text{P}_y$ ). Further, an aluminum oxide compound, typically aluminum oxide ( $\text{Al}_x\text{O}_y$ ), has superior light transparency characteristics, and has a thermal conductivity of  $20 \text{ Wm}^{-1}\text{K}^{-1}$ , and can be said to be a preferable material. These materials not

only possess heat radiation qualities, but also are effective in preventing the penetration of substances such as moisture and alkaline metals. Note that x and y are arbitrary integers for the above transparent materials.

[0046] The above chemical compounds can also be combined with another element. For example, it is possible to use nitrated aluminum oxide, denoted by  $\text{AlN}_x\text{O}_y$ , in which nitrogen is added to aluminum oxide. This material also not only possesses heat radiation qualities, but also is effective in preventing the penetration of substances such as moisture and alkaline metals. Note that x and y are arbitrary integers for the above nitrated aluminum oxide.

[0047] Furthermore, the materials recorded in Japanese Patent Application Laid-open No. Sho 62-90260 can also be used. Namely, a chemical compound containing Si, Al, N, O, and M can also be used (note that M is a rare-earth element, preferably an element selected from the group consisting of Ce (cesium), Yb (ytterbium), Sm (samarium), Er (erbium), Y (yttrium), La (lanthanum), Gd (gadolinium), Dy (dysprosium), and Nd (neodymium)). These materials not only possess heat radiation qualities, but also are effective in preventing the penetration of substances such as moisture and alkaline metals.

[0048] Furthermore, carbon films containing at least a diamond thin film or amorphous carbons (especially those which have characteristics close to those of diamond; referred to as diamond-like carbon) can also be used. These have very high thermal conductivities, and are extremely effective as radiation layers. Note that if the film thickness becomes larger, there is brown banding and the transmissivity is reduced, and therefore it is preferable to use as thin a film thickness (preferably between 5 and 100 nm) as possible.

[0049] Note that the aim of the first passivation film 41 is in protecting the TFT from alkaline metals and from moisture, and therefore it must be made so as to not lose this effect. A thin film made from a material possessing the above radiation effect can be used by itself, but it is effective to laminate this thin film and a thin film having shielding properties against alkaline metals and moisture (typically a silicon nitride film ( $\text{Si}_x\text{N}_y$ ) or a silicon oxynitride film ( $\text{SiO}_x\text{N}_y$ )). Note that x and y are arbitrary integers for the above silicon nitride films and silicon oxynitride films.

[0050] Reference numeral 42 denotes a color filter, and reference numeral 43 denotes a fluorescent substance (also referred to as a fluorescent pigment layer). Both are a combination of the same color, and contain red (R), green (G), or blue (B). The color filter 42 is formed in order to increase the color purity, and the fluorescent substance 43 is formed in order to perform color transformation.

[0051] Note that EL display devices are roughly divided into four types of color displays: a method of forming three types of EL elements corresponding to R, G, and B; a method of combining white color luminescing EL elements with color filters; a method of combining blue or blue-green luminescing EL elements and fluorescent matter (fluorescing color change layer, CCM); and a method of using a transparent electrode as a cathode (opposing electrode) and overlapping EL elements corresponding to R, G, and B.

[0052] The structure of Fig. 1 is an example of a case of using a combination of blue luminescing EL elements and a fluorescent substance. A blue color emitting luminescence layer is used as the EL element 203 here, light possessing blue color region wavelength, including ultraviolet light, is formed, and the fluorescent substance 43 is activated by the light, and made to emit red, green, or blue light. The color purity of the light is increased by the color filter 42, and this is outputted.

[0053] Note that it is possible to implement the present invention without being concerned with the method of luminescence, and that all four of the above methods can be used with the present invention.

[0054] Furthermore, after forming the color filter 42 and the fluorescent substance 43, leveling is performed by a second interlayer insulating film 44. A resin film is preferable as the second interlayer insulating film 44, and one such as polyimide, polyamide, acrylic, or BCB (benzocyclobutane) may be used. An inorganic film may, of course, also be used, provided that sufficient leveling is possible.

[0055] The leveling of steps due to the TFT by the second interlayer insulating film 44 is extremely important. The EL layer formed afterward is very thin, and therefore there are cases in which poor luminescence is caused by the existence of a step. It is therefore preferable to perform leveling before forming a pixel electrode so as to be able to form the EL layer on as level a surface as possible.

[0056] Furthermore, reference numeral 45 is a second passivation film (it has a meaning of heat radiating layer), and the film thickness of 5 nm to 1  $\mu\text{m}$  (typically between 20 and 300 nm) is preferable. This second passivation film is disposed in contact with the EL element, and functions to release the heat generated by the EL element, so that heat is not stored in the EL element. Further, when formed by a resin film, the second interlayer insulating film 44 is weak with respect to heat, and the thermal radiation layer works so as not to impart bad influence due to the heat generated by the EL element.

[0057] It is effective to perform leveling of the TFT by the resin film in manufacturing the EL display device, as stated above, but there has not been a conventional structure which considers the deterioration of the resin film due to heat generated by the EL element. It can be said that solving that point by disposing the second passivation film 45 is one of the characteristics of the present invention.

[0058] Further, the second passivation film 45 functions as a protection layer for not diffusing alkaline metals within the EL layer to the TFTs side as well as preventing the above stated degradation due to heat, and still further functions

as a protection layer that prevents penetration of moisture or oxygen from TFT side to the EL layer.

**[0059]** The same materials as those used as the first passivation film 41 can be used as the second passivation film 45. In particular, as materials having high heat radiating effect, a carbon film such as a diamond film or a diamond-like carbon film is preferable, and in order to prevent penetration of substances such as moisture, it is more preferable to use a lamination structure of a carbon film and a silicon nitride film (or a silicon oxynitride film).

**[0060]** A structure in which TFT side and EL element side are segregated by an insulating film which has a high radiation effect and is capable of shielding moisture and alkaline metal, is an important characteristic of the present invention, and it can be said that it is a structure that did not exist in a conventional EL display device.

**[0061]** Reference numeral 46 denotes a pixel electrode (EL element anode) made from a transparent conducting film. After opening a contact hole in the second passivation film 45, in the second interlayer insulating film 44 and in the first passivation film 41, the pixel electrode 45 is formed so as to be connected to the drain wiring 37 of the current control TFT 202.


**[0062]** An EL layer (an organic material is preferable) 47, a cathode 48, and a protecting electrode 49 are formed in order on the pixel electrode 46. A single layer structure or a lamination structure can be used as the EL layer 47, but there are many cases in which the lamination structure is used. Various lamination structures have been proposed, combinations of layers such as a luminescence layer, an electron transporting layer, an electron injecting layer, a hole injecting layer, and a hole transporting layer, but any structure may be used for the present invention. Doping of a fluorescent pigment into the EL layer may also be performed, of course. Note that a luminescing element formed by a pixel electrode (anode), an EL layer, and a cathode is referred to as an EL element throughout this specification.

**[0063]** All already known EL materials can be used by the present invention. Organic materials are widely known as such materials, and considering the driver voltage, it is preferable to use an organic material. For example, the materials disclosed in the following U.S. Patents and Japanese patent applications can be used as the organic EL material:

**[0064]** U.S. Patent # 4,356,429; U.S. Patent # 4,539,507; U.S. Patent # 4,720,432; U.S. Patent # 4,769,292; U.S. Patent # 4,885,211; U.S. Patent # 4,950,950; U.S. Patent # 5,059,861; U.S. Patent # 5,047,687; U.S. Patent # 5,073,446; U.S. Patent # 5,059,862; U.S. Patent # 5,061,617; U.S. Patent # 5,151,629; U.S. Patent # 5,294,869; U.S. Patent # 5,294,870; Japanese Patent Application Laid-open No. Hei 10-189525; Japanese Patent Application Laid-open No. Hei 8-241048; and Japanese Patent Application Laid-open No. Hei 8-78159.

**[0065]** Specifically, an organic material such as the one shown by the following general formula can be used as a hole injecting layer.


[Chem 1]



**[0066]** Here, Q is either N or a C-R (carbon chain); M is a metal, a metal oxide, or a metal halide; R is hydrogen, an alkyl, an aralkyl, an aryl, or an alkyl; and T1 and T2 are unsaturated six member rings including substituent such as hydrogen, alkyl, or halogen.

**[0067]** Furthermore, an aromatic tertiary amine can be used as an organic material hole transporting layer, preferably including the tetraaryldiamine shown by the following general formula.


[Chem 2]



[0068] In Chem 2 Are is an arylene group, n is an integer from 1 to 4, and Ar, R<sub>7</sub>, R<sub>8</sub>, and R<sub>9</sub> are each various chosen aryl groups.


[0069] In addition, a metal oxynoid compound can be used as an organic material EL layer, electron transporting layer, or electron injecting layer. A material such as that shown by the general formula below may be used as the metal oxynoid compound.

[Chem 3]

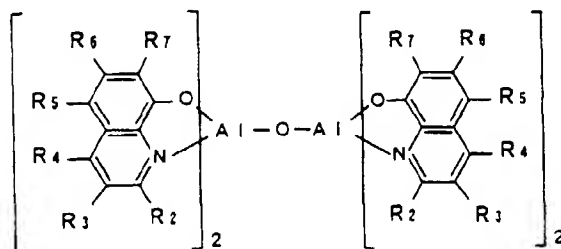

[0070] It is possible to substitute R<sub>2</sub> through R<sub>7</sub>, and a metal oxynoid such as the following can also be used.


[Chem 4]

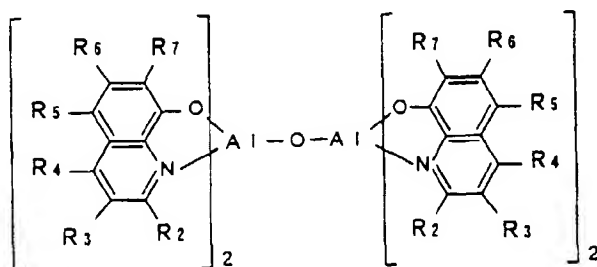

[0071] In Chem 4, R<sub>2</sub> through R<sub>7</sub> are defined as stated above; L<sub>1</sub> through L<sub>5</sub> are carbohydrate groups containing from 1 to 12 carbon elements; and both L<sub>1</sub> and L<sub>2</sub>, or both L<sub>2</sub> and L<sub>3</sub> are formed by benzo-rings. Further, a metal oxynoid such as the following may also be used.



## [ Chem 5 ]



[0072] It is possible to substitute R2 through R6 here. Coordination compounds having organic ligands are thus included as organic EL materials. Note that the above examples are only some examples of organic EL materials which can be used as the EL material of the present invention, and that there is absolutely no need to limit the EL material to these.

[0073] Furthermore, when using an ink jet method for forming the EL layer, it is preferable to use a polymer material as the EL material. Polymer materials such as the following can be given as typical polymer materials: polyparaphenylene vinylenes (PPVs); and polyfluorenes. For colorization, it is preferable to use, for example, a cyano-polyparaphenylene vinylene in a red luminescing material; a polyphenylene vinylene in a green luminescing material; and a polyphenylene vinylene and a polyalkylphenylene in a blue luminescing material. Regarding organic EL materials which can be used in an ink-jet method, all of the materials recorded in Japanese Patent Application Laid-open No. Hei 10-012377 can be cited.

[0074] Furthermore, a material containing a low work coefficient material such as magnesium (Mg), lithium (Li), cesium (Cs), barium (Ba), potassium (K), beryllium (Be), or calcium (Ca) is used as the cathode 48. Preferably, an electrode made from MgAg (a material made from Mg and Ag at a mixture of Mg:Ag = 10:1) may be used. In addition, a MgAgAl electrode, a LiAl electrode, and a LiFAl electrode can be given as other examples. Further, the protecting electrode 49 is an electrode formed in order to be a protecting film against moisture from external to the cathode 48, and a material containing aluminum (Al) or silver (Ag) is used. The protecting electrode 49 also has a heat radiation effect.

[0075] Note that it is desirable to form the EL layer 47 and the cathode 48 in succession, without exposure to the atmosphere. In other words, no matter what type of lamination structure the EL layer and the cathode contain, it is preferable to form everything in a multi-chamber (also referred to as a cluster tool) type deposition device in succession. This is in order to avoid the absorption of moisture when the EL layer is exposed to the atmosphere because if an organic material is used as the EL layer, then it is extremely weak with respect to moisture. In addition, not only the EL layer 47 and the cathode 48, it is even better to form all the way through the protecting electrode 49 in succession.

[0076] The EL layer is extremely weak with respect to heat, and therefore it is preferable to use vacuum evaporation (in particular, an organic molecular beam evaporation method is effective in that it forms a very thin film, on the molecular order level), sputtering, plasma CVD, spin coating, screen printing, or ion plating as the film deposition method. It is also possible to form the EL layer by an ink-jet method. For the ink jet method there is a bubble jet method using cavitation (refer to Japanese Patent Application Laid-open No. Hei 5-116297), and there is a piezo method using a piezo element (refer to Japanese Patent Application Laid-open No. Hei 8-290647), and in view of the fact that organic EL materials are weak with respect to heat, the piezo method is preferable.

[0077] Reference numeral 50 denotes a third passivation film, and its film thickness may be set from 10 nm to 1  $\mu$ m (preferable between 200 and 500 nm). The object of forming the third passivation film 50 is mainly to protect the EL layer 47 from moisture, but it is also good if the third passivation film 50 is made to possess a heat radiation effect, similar to the first passivation film 41. The same materials as used for the first passivation film 41 can therefore be used as the formation material of the third passivation film 50. Note that when an organic material is used as the EL layer 47, it is possible that the EL layer deteriorates due to bonding with oxygen, and therefore it is preferable to use an insulating film which does not easily emit oxygen.

[0078] Further, the EL layer is weak with respect to heat, as stated above, and therefore it is preferable to perform film deposition at a low temperature as possible (preferably in the range from room temperature to 120°C). It can therefore be said that plasma CVD, sputtering, vacuum evaporation, ion plating, and solution application (spin coating) are desirable film deposition methods.

[0079] Though the degradation of EL elements can be sufficiently suppressed by only disposing the second passivation film 45 as stated above, more preferably the EL elements are enclosed by 2 layers of insulating films that are

formed to sandwich the EL elements, like as the second passivation film 45 and the third passivation film 50, and penetration of moisture and oxygen into the EL layer, diffusion of alkaline metals from the EL layer, and storage of heat in the EL layer are prevented. As a result, the degradation of the EL layer is further suppressed, and an EL display device having high reliability can be obtained.

**[0080]** The EL display device of the present invention has a pixel portion containing a pixel with a structure of Fig. 1, and TFTs having differing structures in response to their function are arranged in the pixel. A switching TFT having a sufficiently low off current value, and a current control TFT which is strong with respect to hot carrier injection can be formed within the same pixel, and an EL display device having high reliability and which is capable of good image display (high operation performance) can thus be formed.

**[0081]** Note that the most important point in the pixel structure of Fig. 1 is that a multi-gate structure TFT is used as the switching TFT, and that it is not necessary to place limits on the structure of Fig. 1 with regard to such things as the placement of LDD regions.

**[0082]** A more detailed explanation of the present invention, having the above constitution, is now performed by the embodiments shown below.

#### Embodiment 1

**[0083]** The embodiments of the present invention are explained using Figs. 3A to 5C. A method of manufacturing a pixel portion, and TFTs of a driver circuit portion formed in the periphery of the pixel portion, is explained here. Note that in order to simplify the explanation, a CMOS circuit is shown as a basic circuit for the driver circuits.

**[0084]** First, as shown in Fig. 3A, a base film 301 is formed with a 300 nm thickness on a glass substrate 300. Silicon oxynitride films are laminated as the base film 301 in embodiment 1. It is good to set the nitrogen concentration to between 10 and 25 wt% in the film contacting the glass substrate 300.

**[0085]** Further, it is effective to form an insulating film, made from the same material as that of the first passivation film 41 shown in Fig. 1, as a portion of the base film 301. A large electric current flows in a current control TFT, heat is easily generated, and therefore it is effective to form the heat radiating layer as close as possible to the current control TFT.

**[0086]** Next, an amorphous silicon film (not shown in the figures) is formed with a thickness of 50 nm on the base film 301 by a known deposition method. Note that it is not necessary to limit this to the amorphous silicon film, and another film may be formed provided that it is a semiconductor film containing an amorphous structure (including a microcrystalline semiconductor film). In addition, a compound semiconductor film containing an amorphous structure, such as an amorphous silicon germanium film, may also be used. Further, the film thickness may be made from 20 to 100 nm.

**[0087]** The amorphous silicon film is then crystallized by a known method, forming a crystalline silicon film (also referred to as a polycrystalline silicon film or a polysilicon film) 302. Thermal crystallization using an electric furnace, laser annealing crystallization using a laser, and lamp annealing crystallization using an infrared lamp exist as known crystallization methods. Crystallization is performed in embodiment 1 using light from an excimer laser which uses XeCl gas.

**[0088]** Note that pulse emission type excimer laser light formed into a linear shape is used in embodiment 1, but a rectangular shape may also be used, and continuous emission argon laser light and continuous emission excimer laser light can also be used.

**[0089]** The crystalline silicon film is used as an active layer of the TFTs in embodiment 1, but it is also possible to use an amorphous silicon film as the active layer. However, it is necessary for a large current to flow through the current control TFT, and therefore it is more effective to use the crystalline silicon film, through which current easily flows.

**[0090]** Note that it is effective to form the active layer of the switching TFT, in which there is a necessity to reduce the off current, by the amorphous silicon film, and to form the active layer of the current control TFT by the crystalline silicon film. Electric current flows with difficulty in the amorphous silicon film because the carrier mobility is low, and the off current does not easily flow. In other words, the most can be made of the advantages of both the amorphous silicon film, through which current does not flow easily, and the crystalline silicon film, through which current easily flows.

**[0091]** Next, as shown in Fig. 3B, a protecting film 303 is formed on the crystalline silicon film 302 from a silicon oxide film having a thickness of 130 nm. This thickness may be chosen within the range of 100 to 200 nm (preferably between 130 and 170 nm). Furthermore, other films may also be used providing that they are insulating films containing silicon. The protecting film 303 is formed so that the crystalline silicon film is not directly exposed to plasma during addition of an impurity, and so that it is possible to have delicate concentration control of the impurity.

**[0092]** Resist masks 304a and 304b are then formed on the protecting film 303, and an impurity element which imparts n-type conductivity (hereafter referred to as an n-type impurity element) is added. Note that elements residing in periodic table group 15 are generally used as the n-type impurity element, and typically phosphorous or arsenic can be used. Note that a plasma doping method is used, in which phosphine ( $\text{PH}_3$ ) is plasma activated without separation

of mass, and phosphorous is added at a concentration of  $1 \times 10^{18}$  atoms/cm<sup>3</sup> in embodiment 1. An ion implantation method, in which separation of mass is performed, may also be used, of course.

**[0093]** The dose amount is regulated so that the n-type impurity element is contained in n-type impurity regions 305 and 306, thus formed by this process, at a concentration of  $2 \times 10^{16}$  to  $5 \times 10^{19}$  atoms/cm<sup>3</sup> (typically between  $5 \times 10^{17}$  and  $5 \times 10^{18}$  atoms/cm<sup>3</sup>).

**[0094]** Next, as shown in Fig. 3C, the protecting film 303 is removed, and activation of the added periodic table group 15 element is performed. A known technique of activation may be used as the means of activation, and activation is done in embodiment 1 by irradiation of excimer laser light. Both of pulse emission type laser and a continuous emission type laser may be used, and it is not necessary to place any limits on the use of excimer laser light. The goal is the activation of the added impurity element, and it is preferable that irradiation is performed at an energy level at which the crystalline silicon film does not melt. Note that the laser irradiation may also be performed with the protecting film 303 in place.

**[0095]** Activation by heat treatment may also be performed along with activation of the impurity element by laser light. When activation is performed by heat treatment, considering the heat resistance of the substrate, it is good to perform heat treatment on the order of 450 to 550°C.

**[0096]** A boundary portion (connecting portion) with regions along the edges of the n-type impurity regions 305 and 306, namely regions along the perimeter into which the n-type impurity element, which exists in the n-type impurity regions 305 and 306, is not added, is defined by this process. This means that, at the point when the TFTs are later completed, extremely good connections can be formed between LDD regions and channel forming regions.

**[0097]** Unnecessary portions of the crystalline silicon film are removed next, as shown in Fig. 3D, and island shape semiconductor films (hereafter referred to as active layers) 307 to 310 are formed.

**[0098]** Then, as shown in Fig. 3E, a gate insulating film 311 is formed, covering the active layers 307 to 310. An insulating film containing silicon and with a thickness of 10 to 200 nm, preferably between 50 and 150 nm, may be used as the gate insulating film 311. A single layer structure or a lamination structure may be used. A 110 nm thick silicon oxynitride film is used in embodiment 1.

**[0099]** A conducting film with a thickness of 200 to 400 nm is formed next and patterned, forming gate electrodes 312 to 316. Note that in embodiment 1, the gate electrodes and lead wirings electrically connected to the gate electrodes (hereafter referred to as gate wirings) are formed from different materials. Specifically, a material having a lower resistance than that of the gate electrodes is used for the gate wirings. This is because a material which is capable of being micro-processed is used as the gate electrodes, and even if the gate wirings cannot be micro-processed, the material used for the wirings has low resistance. Of course, the gate electrodes and the gate wirings may also be formed from the same material.

**[0100]** Further, the gate wirings may be formed by a single layer conducting film, and when necessary, it is preferable to use a two layer or a three layer lamination film. All known conducting films can be used as the gate electrode material. However, as stated above, it is preferable to use a material which is capable of being micro-processed, specifically, a material which is capable of being patterned to a line width of 2 μm or less.

**[0101]** Typically, a film of a material chosen from among the group consisting of tantalum (Ta), titanium (Ti), molybdenum (Mo), tungsten (W), and chromium (Cr); or a nitrated compound of the above elements (typically a tantalum nitride film, a tungsten nitride film, or a titanium nitride film); or an alloy film of a combination of the above elements (typically a Mo-W alloy or a Mo-Ta alloy); or a silicide film of the above elements (typically a tungsten silicide film or a titanium silicide film); or a silicon film which has been made to possess conductivity can be used. A single layer film or a lamination may be used, of course.

**[0102]** A lamination film made from a 50 nm thick tantalum nitride (TaN) film and a 350 nm thick Ta film is used in embodiment 1. It is good to form this film by sputtering. Furthermore, if an inert gas such as Xe or Ne is added as a sputtering gas, then film peeling due to the stress can be prevented.

**[0103]** The gate electrodes 313 and 316 are formed at this time so as to overlap a portion of the n-type impurity regions 305 and 306, respectively, sandwiching the gate insulating film 311. This overlapping portion later becomes an LDD region overlapping the gate electrode.

**[0104]** Next, an n-type impurity element (phosphorous is used in embodiment 1) is added in a self-aligning manner with the gate electrodes 312 to 316 as masks, as shown in Fig. 4A. The addition is regulated so that phosphorous is added to impurity regions 317 to 323 thus formed at a concentration of 1/10 to 1/2 that of the impurity regions 305 and 306 (typically between 1/4 and 1/3). Specifically, a concentration of  $1 \times 10^{16}$  to  $5 \times 10^{18}$  atoms/cm<sup>3</sup> (typically  $3 \times 10^{17}$  to  $3 \times 10^{18}$  atoms/cm<sup>3</sup>) is preferable.

**[0105]** Resist masks 324a to 324d are formed next to cover the gate electrodes, as shown in Fig. 4B, and an n-type impurity element (phosphorous is used in embodiment 1) is added, forming impurity regions 325 to 331 containing a high concentration of phosphorous. Ion doping using phosphine (PH<sub>3</sub>) is also performed here, and is regulated so that the phosphorous concentration of these regions is from  $1 \times 10^{20}$  to  $1 \times 10^{21}$  atoms/cm<sup>3</sup> (typically between  $2 \times 10^{20}$  and  $5 \times 10^{20}$  atoms/cm<sup>3</sup>).

**[0106]** A source region or a drain region of the n-channel TFT is formed by this process, and in the switching TFT, a portion of the n-type impurity regions 320 to 322 formed by the process of Fig. 4A remains. These remaining regions correspond to the LDD regions 15a to 15d of the switching TFT in Fig. 1.

**[0107]** Next, as shown in Fig. 4C, the resist masks 324a to 324d are removed, and a new resist mask 332 is formed. A p-type impurity element (boron is used in embodiment 1) is then added, forming impurity regions 333 and 334 containing a high concentration of boron. Boron is added here to a concentration of  $3 \times 10^{20}$  to  $3 \times 10^{21}$  atoms/cm<sup>3</sup> (typically between  $5 \times 10^{20}$  and  $1 \times 10^{21}$  atoms/cm<sup>3</sup>) by ion doping using diborane (B<sub>2</sub>H<sub>6</sub>).

**[0108]** Note that phosphorous has already been added to the impurity regions 333 and 334 at a concentration of  $1 \times 10^{16}$  to  $5 \times 10^{18}$  atoms/cm<sup>3</sup>, but boron is added here at a concentration of at least 3 times that of the phosphorous. Therefore, the n-type impurity regions already formed completely invert to p-type, and function as p-type impurity regions.

**[0109]** Next, after removing the resist mask 332, the n-type and p-type impurity elements added at various concentrations are activated. Furnace annealing, laser annealing, or lamp annealing may be performed as a means of activation. Heat treatment is performed in embodiment 1 in a nitrogen atmosphere for 4 hours at 550°C in an electric furnace.

**[0110]** It is important to remove as much of the oxygen in the atmosphere as possible at this time. This is because if any oxygen exists, then the exposed surface of the electrode oxidizes, inviting an increase in resistance, and at the same time it becomes more difficult to later make an ohmic contact. It is therefore preferable that the concentration of oxygen in the atmosphere in the above activation process be 1 ppm or less, desirably 0.1 ppm or less.

**[0111]** After the activation process is completed, a gate wiring 335 with a thickness of 300 nm is formed next. A metallic film having aluminum (Al) or copper (Cu) as its principal constituent (comprising 50 to 100% of the composition) may be used as the material of the gate wiring 335. As with the gate wiring 211 of Fig. 2, the gate wiring 335 is formed with a placement so that the gate electrodes 314 and 315 of the switching TFTs (corresponding to gate electrodes 19a and 19b of Fig. 2) are electrically connected. (See Fig. 4D.)

**[0112]** The wiring resistance of the gate wiring can be made extremely small by using this type of structure, and therefore a pixel display region (pixel portion) having a large surface area can be formed. Namely, the pixel structure of embodiment 1 is extremely effective because an EL display device having a screen size of a 10 inch diagonal or larger (in addition, a 30 inch or larger diagonal) is realized.

**[0113]** A first interlayer insulating film 336 is formed next, as shown in Fig. 5A. A single layer insulating film containing silicon is used as the first interlayer insulating film 336, but a lamination film may be combined in between. Further, a film thickness of between 400 nm and 1.5 μm may be used. A lamination structure of an 800 nm thick silicon oxide film on a 200 nm thick silicon oxynitride film is used in embodiment 1.

**[0114]** In addition, heat treatment is performed for 1 to 12 hours at 300 to 450° C in an atmosphere containing between 3 and 100% hydrogen, performing hydrogenation. This process is one of hydrogen termination of dangling bonds in the semiconductor film by hydrogen which is thermally activated. Plasma hydrogenation (using hydrogen activated by a plasma) may also be performed as another means of hydrogenation.

**[0115]** Note that the hydrogenation step may also be inserted during the formation of the first interlayer insulating film 336. Namely, hydrogen processing may be performed as above after forming the 200 nm thick silicon oxynitride film, and then the remaining 800 nm thick silicon oxide film may be formed.

**[0116]** A contact hole is formed next in the first interlayer insulating film 336, and source wirings 337 to 340, and drain wirings 341 to 343 are formed. In embodiment 1, a lamination film with a three layer structure of a 100 nm titanium film, a 300 nm aluminum film containing titanium, and a 150 nm titanium film, formed successively by sputtering, is used as these wirings. Other conducting films may also be used, of course, and an alloy film containing silver, palladium, and copper may also be used.

**[0117]** A first passivation film 344 is formed next with a thickness of 50 to 500 nm (typically between 200 and 300 nm). A 300 nm thick silicon oxynitride film is used as the first passivation film 344 in embodiment 1. This may also be substituted by a silicon nitride film. It is of course possible to use the same materials as those of the first passivation film 41 of Fig. 1.

**[0118]** Note that it is effective to perform plasma processing using a gas containing hydrogen such as H<sub>2</sub> or NH<sub>3</sub> before the formation of the silicon oxynitride film. Hydrogen activated by this preprocess is supplied to the first interlayer insulating film 336, and the film quality of the first passivation film 344 is improved by performing heat treatment. At the same time, the hydrogen added to the first interlayer insulating film 336 diffuses to the lower side, and the active layers can be hydrogenated effectively.

**[0119]** Next, as shown in Fig. 5B, a color filter 345 and a fluorescing body 346 are formed. Known materials may be used for these. Furthermore, they may be formed by being patterned separately, or they may be formed in succession and then patterned together. A method such as screen printing, ink jetting, or mask evaporation (a selective forming method using a mask material) may be used as the formation method.

**[0120]** The respective film thickness may be chosen in the range of 0.5 to 5 μm (typically between 1 and 2 μm). In

particular, the optimal film thickness of the fluorescing body 346 varies with the material used. In other words, if it is too thin, then the color transformation efficiency becomes poor, and if it is too thick, then the step becomes large and the amount of light transmitted drops. Optimal film thicknesses must therefore be set by taking a balance of both characteristics.

**[0121]** Note that, in embodiment 1, an example of a color changing method in which the light emitted from the EL layer is transformed in color, but if a method of manufacturing individual EL layers which correspond to R, G, and B, is employed, then the color filter and the fluorescing body can be omitted.

**[0122]** A second interlayer insulating film 347 is formed next from a resin. Materials such as polyimide, polyamide, acrylic, and BCB (benzocyclobutene) can be used as the resin. In particular, the purpose of being a leveling film is strong in the second interlayer insulating film 347, and therefore acrylic, having superior leveling characteristics, is preferable. An acrylic film is formed in embodiment 1 with a film thickness which can sufficiently level the step between the color filter 345 and the fluorescing body 346. This thickness is preferably from 1 to 5  $\mu\text{m}$  (more preferably between 2 and 4  $\mu\text{m}$ ).

**[0123]** A second passivation film 348 is then formed on the second interlayer insulating film 347 to 100 nm thickness. An insulating film comprising Si, Al, N, O and La is used in the present embodiment. A contact hole for reaching the drain wiring 343 is then formed in the second passivation film 348, in the second interlayer insulating film 347 and in the first passivation film 344, and a pixel electrode 349 is formed. A compound of indium oxide and tin oxide is formed into 110 nm thick in embodiment 1, and patterning is performed, making the pixel electrode. The pixel electrode 349 becomes an anode of the EL element. Note that it is also possible to use other materials: a compound film of indium oxide and zinc oxide, or a zinc oxide film containing gallium oxide.

**[0124]** Note that embodiment 1 becomes a structure in which the pixel electrode 349 is electrically connected to the drain region 331 of the current control TFT, through the drain wiring 343. This structure has the following advantages.

**[0125]** The pixel electrode 349 becomes directly connected to an organic material such as the EL layer (emitting layer) or a charge transporting layer, and therefore it is possible for the mobile ions contained in the EL layer to diffuse throughout the pixel electrode. In other words, without connecting the pixel electrode 348 directly to the drain region 331, a portion of the active layer, the introduction of mobile ions into the active layer due to the drain wiring 343 being interrupted can be prevented in the structure of embodiment 1.

**[0126]** Next, as shown in Fig. 5C, an EL layer 350, a cathode (MgAg electrode) 351, and a protecting electrode 352 are formed in succession without exposure to the atmosphere. It is preferable, at this point, to perform heat treatment of the pixel electrode 349, completely removing all moisture, before forming the EL layer 350 and the cathode 351. Note that a known material can be used as the EL layer 350.


**[0127]** The materials explained in the "embodiment mode" section of this specification can be used as the EL layer 350. In embodiment 1, an EL layer having a 4 layer structure of a hole injecting layer, a hole transporting layer, an emitting layer, and an electron transporting layer is used, as shown in Fig. 19, but there are cases in which the electron transporting layer is not formed, and cases in which an electron injecting layer is also formed. Furthermore, there are also cases in which the hole injecting layer is omitted. Several examples of these types of combinations have already been reported, and any of these constitutions may be used.

**[0128]** An amine such as TPD (triphenylamine dielectric) may be used as the hole injecting layer or as the hole transporting layer, and in addition, a hydrazone (typically DEH), a stilbene (typically STB), or a starburst (typically m-MTDATA) can also be used. In particular, a starburst material, which has a high glass transition temperature and is difficult to crystallize, is preferable. Further, polyaniline (PAni), polythiophene (PEDOT), and copper phthalocyanine (CuPc) may also be used.

**[0129]** BPPC, perylene, and DCM can be used as a red color emitting layer in the emitting layer, and in particular, the Eu complex shown by  $\text{Eu}(\text{DBM})_3(\text{Phen})$  (refer to Kido, J., et. al, Appl. Phys., vol. 35, pp. L394-6, 1996 for details) is highly monochromatic, possessing a sharp emission at a wavelength of 620 nm.


**[0130]** Further, typically an Alq3 (8-hydroxyquinoline aluminum) material in which quinacridone or coumarin is added at a level of several mol% can be used as a green color emitting layer. The chemical formula is as shown below.

## [Chem 6]



[0131] In addition, typically a distile-arylene amino dielectric, in which amino substituted DSA is added to DSA (distile-arylene dielectric) can be used as a blue color emitting layer. In particular, it is preferable to use the high performance material distilyl-biphenyl (DPVBi). Its chemical formula is as shown below.

## [Chem 7]

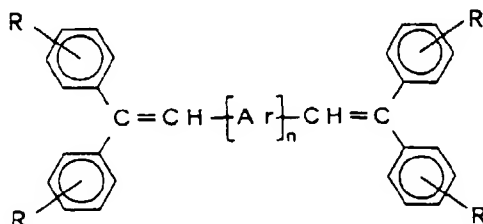

[0132] Though it is possible to protect the EL layer 350 from moisture and oxygen with the protecting electrode 352, more preferably a third passivation film 353 may be formed. In the present embodiment a 300 nm thick silicon oxynitride film is disposed as the third passivation film 353. It is acceptable to successively form the third passivation film after the protecting electrode 352 without exposure to the atmosphere. The same materials as those of the third passivation film 50 of Fig. 1 can also be used, of course, as the third passivation film 353.

[0133] A 4 layer structure made from a hole injecting layer, a hole transporting layer, an emitting layer, and an electron injecting layer is used in embodiment 1, but there are already examples of many combinations already reported, and any of these constitutions may also be used. Furthermore, an MgAg electrode is used as the cathode of the EL element in embodiment 1, but other known materials may also be used.

[0134] The protecting electrode 352 is formed in order to prevent deterioration of the MgAg electrode 351, and a metallic film having aluminum as its principal constituent is typical. Other materials may, of course, also be used. Furthermore, the EL layer 350 and the MgAg electrode 351 are extremely weak with respect to moisture, and therefore it is preferable to perform successive formation up through to the protecting electrode 352 without exposure to the atmosphere, protecting the EL layer from external air.

[0135] Note that the film thickness of the EL layer 350 may be from 10 to 400 nm (typically between 60 and 160 nm), and that the thickness of the MgAg electrode 351 may be from 180 to 300 nm (typically between 200 and 250 nm).

[0136] The active matrix type EL display device with the structure shown in Fig. 5C is thus completed. By arranging TFTs with optimal structure in not only the pixel portion, but also in the driver circuit portion, the active matrix type EL display device of embodiment 1 shows extremely high reliability, and the operational characteristics can be raised.

[0137] First, a TFT having a structure which reduces hot carrier injection as much as possible without a drop in the operation speed is used as an n-channel TFT 205 of the CMOS circuit forming the driver circuits. Note that the driver circuits referred to here include circuits such as a shift register, a buffer, a level shifter, and a sampling circuit (also referred to as a transfer gate). When digital driving is performed, signal conversion circuits such as a D/A converter circuit are also included.

**[0138]** In the case of embodiment 1, an active layer of the n-channel TFT 205 includes a source region 355, a drain region 356, an LDD region 357, and a channel forming region 358, as shown in Fig. 5C, and the LDD region 357 overlaps the gate electrode 313, sandwiching the gate insulating film 311.

**[0139]** The formation of the LDD region on the drain side only is in consideration of not lowering the operation speed. Further, it is not necessary to be concerned with the value of the off current in the n-channel TFT 205, and greater emphasis may be placed on the operation speed. It is therefore preferable that the LDD region 357 completely overlap the gate electrode 313, reducing resistive components as much as possible. In other words, it is good to eliminate all offset.

**[0140]** Deterioration of a p-channel TFT 206 of the CMOS circuit due to hot carrier injection is almost of no concern, and in particular, therefore, an LDD region is not formed. It is also possible, of course, to take action against hot carriers by forming an LDD region similar to that of the n-channel TFT 205.

**[0141]** Note that among the driver circuits, the sampling circuit is somewhat special when compared to the other circuits, and a large current flows in the channel forming region in both directions. Namely, the roles of the source region and the drain region change. In addition, it is necessary to suppress the value of the off current as much as possible, and with that in mind, it is preferable to arrange a TFT having functions at an intermediate level between the switching TFT and the current control TFT.

**[0142]** It is preferable, therefore, to arrange a TFT with the structure shown in Fig. 9 as an n-type TFT forming the sampling circuit. As shown in Fig. 9, a portion of LDD regions 901a and 901b overlap a gate electrode 903, sandwiching a gate insulating film 902. This effect is as stated in the explanation of the current control TFT 202, and the case of the sampling circuit differs in the point of forming the LDD regions 901a and 901b with a shape that sandwiches a channel forming region 904.

**[0143]** Further, a pixel with the structure shown in Fig. 1 is formed, forming a pixel portion. The structures of a switching TFT and a current control TFT formed within the pixel have already been explained in Fig. 1, and therefore that explanation is omitted here.

**[0144]** Note that, in practice, it is preferable to additionally perform packaging (sealing) after completing up through Fig. 5C by using a housing material such as a highly airtight protecting film (such as a laminar film or an ultraviolet hardened resin film) or a ceramic sealing can, so that there is no exposure to the atmosphere. By making the inside of the housing material an inert environment, and by placing an absorbing agent (for example, barium oxide) within the housing material, the reliability (life) of the EL layer is increased.

**[0145]** Furthermore, after the airtightness is increased by the packaging processing, a connector (a flexible printed circuit, FPC) for connecting between output terminals from elements or circuits formed on the substrate, and external signal terminals, is attached, completing a manufactured product. The EL display device in this state of being able to be shipped is referred to as an EL module throughout this specification.

**[0146]** The constitution of the active matrix type EL display device of embodiment 1 is explained here using the perspective view of Fig. 6. The active matrix type EL display device of embodiment 1 is formed on a glass substrate 601, and is composed of a pixel portion 602, a gate side driving circuit 603, and a source side driving circuit 604. A switching TFT 605 of the pixel portion is an n-channel TFT, and is placed at the intersection of a gate wiring 606 connected to the gate side driving circuit 603, and a source wiring 607 of the source side driving circuit 604. Furthermore, the drain of the switching TFT 605 is electrically connected to the gate of a current control TFT 608.

**[0147]** In addition, the source of the current control TFT 608 is connected to a current supply line 609, and an EL element 610 is electrically connected to the drain of the current control TFT 608. Provided that the current control TFT 608 is an n-channel TFT, it is preferable to connect the cathode of the EL element 610 to the drain of the current control TFT 608 at this point. Further, if the current control TFT 608 is a p-channel TFT, then it is preferable to connect the anode of the EL element 610 to the drain of the current control TFT 608.

**[0148]** Input wirings (connection wirings) 612 and 613, and an input wiring 614 which is connected to the current supply line 609, are then formed in an external input terminal FPC 611 in order to transfer signals to the driver circuits.

**[0149]** Shown in Fig. 7 is one example of the circuit composition of the EL display device shown in Fig. 6. The EL display device of embodiment 1 has a source side driving circuit 701, a gate side driving circuit (A) 707, a gate side driving circuit (B) 711, and a pixel portion 706. Note that, throughout this specification, driver circuit is a generic term which includes source side driver circuits and gate side driver circuits.

**[0150]** The source side driving circuit 701 is provided with a shift register 702, a level shifter 703, a buffer 704, and a sampling circuit (transfer gate) 705. In addition, the gate side driving circuit (A) 707 is provided with a shift register 708, a level shifter 709, and a buffer 710. The gate side driving circuit (B) 711 has a similar composition.

**[0151]** The driving voltage is from 5 to 16 V (typically 10 V) for the shifter registers 702 and 708 here, and the structure shown by reference numeral 205 of Fig. 5C is suitable for an n-channel TFT used in a CMOS circuit forming the circuits.

**[0152]** Furthermore, the driving voltage becomes high at between 14 and 16 V for the level shifters 703 and 709, and for the buffers 704 and 710, and similar to the shifters, a CMOS circuit containing the n-channel TFT 205 of Fig. 5C is suitable. Note that the use of a multi-gate structure, such as a double gate structure or a triple gate structure for

the gate wirings, is effective by increasing the reliability of each circuit.

**[0153]** The driving voltage is between 14 and 16 V for the sampling circuit 705, but it is necessary to reduce the value of the off current because the source region and the drain region invert, and therefore a CMOS circuit containing the n-channel TFT 208 of Fig. 9 is suitable.

**[0154]** In addition, the driving voltage of the pixel portion 706 is between 14 and 16 V, and a pixel with the structure shown in Fig. 1 is arranged.

**[0155]** Note that the above constitutions can be easily realized by manufacturing TFTs in accordance with the manufacturing processes shown in Figs. 3A to 5C. Furthermore, only the constitution of the pixel portion and the driver circuits is shown in embodiment 1, but it is also possible to form other logic circuits, in addition to the driving circuits, on the same substrate and in accordance with the manufacturing process of embodiment 1, such as a signal divider circuit, a D/A converter circuit, an op-amp circuit, and a  $\gamma$  compensation circuit. In addition, it is considered that circuits such as a memory portion and a microprocessor can also be formed.

**[0156]** An explanation of the EL module of embodiment 1, containing the housing material, is made using Figs. 17A and 17B. Note that, when necessary, the symbols used in Figs. 6 and 7 are cited.

**[0157]** A pixel portion 1701, a source side driving circuit 1702, and a gate side driving circuit 1703 are formed on a substrate (including a base film underneath a TFT) 1700. Various wirings from the respective driver circuits are connected to external equipment, via the FPC 611, through the input wirings 612 to 614.

**[0158]** A housing material 1704 is formed at this point enclosing at least the pixel portion, and preferably the driving circuits and the pixel portion. Note that the housing material 1704 is of an irregular shape in which the internal size is larger than the external size of the EL element, or has a sheet shape, and is fixed to the substrate 1700 by an adhesive 1705 so as to form an airtight space jointly with the substrate 1700. At this point, the EL element is in a state of being completely sealed in the above airtight space, and is completely cutoff from the external atmosphere. Note that a multiple number of housing materials 1704 may be formed.

**[0159]** It is preferable to use an insulating substance such as a glass or a polymer as the housing material 1704. The following can be given as examples: amorphous glass (such as borosilicate glass or quartz); crystallized glass; ceramic glass; organic resins (such as acrylic resins, styrene resins, polycarbonate resins, and epoxy resins); and silicone resins. In addition, ceramics may also be used. Furthermore, provided that the adhesive 1705 is an insulating material, it is also possible to use a metallic material such as a stainless alloy.

**[0160]** It is possible to use an adhesive such as an epoxy resin or an acrylate resin as the material of the adhesive 1705. In addition, a thermally hardened resin or a light hardened resin can also be used as the adhesive. Note that it is necessary to use a material through which, as much as is possible, oxygen and moisture is not transmitted.

**[0161]** In addition, it is preferable to fill an opening 1706 between the housing material and the substrate 1700 with an inert gas (such as argon, helium, or nitrogen). There are no limitations on a gas, and it is also possible to use an inert liquid (such as a liquid fluorinated carbon, typically perfluoroalkane). The materials such as those used by Japanese Patent Application Laid-open No. Hei 8-78519 may be referred to regarding inert liquids. The space may also be filled with a resin.

**[0162]** It is effective to form drying agent in the opening 1706. Materials such as those recorded in Japanese Patent Application Laid-open No. Hei 9-148066 can be used as the drying agent. Typically, barium oxide may be used. Furthermore, it is effective to form an antioxidizing agent as well, not just a drying agent.

**[0163]** A plural number of isolated pixels having EL elements are formed in the pixel portion, as shown in Fig. 17B, and all of the pixels have a protecting electrode 1707 as a common electrode. In embodiment 1 it is preferable to form the EL layer, the cathode (MgAg electrode), and the protecting electrode in succession, without exposure to the atmosphere. The EL layer and the cathode are formed using the same mask material, and provided that only the protecting electrode is formed by a separate mask material, then the structure of Fig. 17B can be realized.

**[0164]** The EL layer and the cathode may be formed only in the pixel portion at this point, and it is not necessary to form them on the driving circuits. There is no problem, of course, with forming them on the driving circuits, but considering the fact that alkaline metals are contained in the EL layer, it is preferable to not form it over the driving circuits.

**[0165]** Note that an input wiring 1709 is connected to the protecting electrode 1707 in a region shown by reference numeral 1708. The input wiring 1709 is a wiring for providing a preset voltage to the protecting electrode 1707, and is connected to the FPC 611 through a conducting paste material (typically an anisotropic conducting film) 1710.

**[0166]** A manufacturing process for realizing a contact structure in the region 1708 is explained here using Figs. 18A to 18C.

**[0167]** First, the state of Fig. 5A is obtained in accordance with the processes of embodiment 1. At this point the first interlayer insulating film 336 and the gate insulating film 311 are removed from the edges of the substrate (in the region shown by reference numeral 1708 in Fig. 17B), and the input wiring 1709 is formed on that region. The source wirings and the drain wirings of Fig. 5A are of course formed at the same time. (See Fig. 18A.)

**[0168]** Next, when etching the second passivation film 348, the second interlayer insulating film 347 and the first passivation film 344 in Fig. 5B, a region shown by reference numeral 1801 is removed, and an open portion 1802 is



formed. (See Fig. 18B.)

[0169] The processes of forming the EL element (pixel electrode, EL layer, and cathode formation processes) in the pixel portion are performed in this state. A mask material is used in the region shown in Figs. 18A to 18C at this time so that the EL element is not formed in this region. After forming the cathode 351, the protecting electrode 352 is formed using a separate mask material. The protecting electrode 352 and the input wiring 1709 are thus electrically connected. Further, the third passivation film 353 is formed, and the state of Fig. 18C is obtained.

[0170] The contact structure of the region shown by reference numeral 1708 in Fig. 17B is thus realized by the above steps. The input wiring 1709 is then connected to the FPC 611 through the opening between the housing material 1704 and the substrate 1700 (note that this is filled by the adhesive 1705; in other words, it is necessary for the thickness of the adhesive 1705 to be such that it can sufficiently level the step of the input wiring). Note that an explanation of the input wiring 1709 is made here, but the other input wirings 612 to 614 are also similarly connected to the FPC 611 by passing under the housing material 1704.

## Embodiment 2

[0171] In embodiment 2, an example of a pixel constitution is shown in Fig. 10 which differs from the constitution shown in Fig. 2B.

[0172] The two pixels shown in Fig. 2B are arranged with symmetry around the current supply line in embodiment 2. Namely, as shown in Fig. 10, by making the current supply line 213 common between the two pixels neighboring the current supply line, the number of wirings needed can be reduced. Note that the structure of the TFTs placed inside the pixels may be left as is.

[0173] If this type of constitution is used, then it becomes possible to manufacture a very high precision pixel portion, increasing the image quality.

[0174] Note that the constitution of embodiment 2 can easily be realized in accordance with the manufacturing processes of embodiment 1, and that the explanations of embodiment 1 and of Fig. 1 may be referenced regarding points such as the structure of the TFTs.

## Embodiment 3

[0175] A case of forming a pixel portion having a structure which differs from that of Fig. 1 is explained using Fig. 11 in embodiment 3. Note that processes up through the formation of the second interlayer insulating film 44 may be performed in accordance with embodiment 1. Furthermore, the structures of the switching TFT 201 and the current control TFT 202, covered by the second interlayer insulating film 44, are the same as those of Fig. 1, and their explanation here is omitted.

[0176] In the case of embodiment 3, a pixel electrode 51, a cathode 52, and an EL layer 53 are formed after forming a contact hole in the second passivation film 45, the second interlayer insulating film 44 and the first passivation film 41. The cathode 52 and the EL layer 53 are formed in succession, without exposure to the atmosphere, by vacuum evaporation in embodiment 3, and at that time a red color emitting EL layer, a green color emitting EL layer, and a blue color emitting layer are formed selectively in separate pixels by using a mask material. Note that while only one pixel is shown in Fig. 11, pixels with the same structure are formed corresponding to the colors of red, green, and blue, respectively, and that color display can be performed by these pixels. A known material may be employed for each EL layer color.

[0177] A 150 nm thick aluminum alloy film (an aluminum film containing 1 wt% of titanium) is formed as the pixel electrode 51 in embodiment 3. Provided that it is a metallic material, any material may be used as the pixel electrode material, but it is preferable to use a material having a high reflectivity. Further, a 230 nm thick MgAg electrode is used as the cathode 52, and the film thickness of the EL layer 53 is 120 nm.

[0178] An anode 54 made from a transparent conducting film (an ITO film in embodiment 3) is formed next with a thickness of 110 nm. An EL element 209 is thus formed, and if a third passivation film 55 is formed by the same materials as shown in embodiment 1, then a pixel with the structure shown in Fig. 11 is completed.

[0179] When using the structure of embodiment 3, the red, green, or blue light generated by each pixel is irradiated in the opposite direction as that of the substrate on which the TFTs are formed. For that reason, almost the entire area inside the pixel, namely the region in which the TFTs are formed, can be used as an effective emitting region. As a result, there is a sharp increase in the effective emitting surface area of the pixel, and the brightness and the contrast ratio (the ratio between light and dark) of the image are increased.

[0180] Note that it is possible to freely combine the composition of embodiment 3 with the constitutions of any of embodiments 1 and 2.

Embodiment 4

[0181] A case of forming a pixel having a structure which differs from that of Fig. 2 of embodiment 1 is explained in embodiment 4 using Figs. 12A and 12B.

[0182] In Fig. 12A, reference numeral 1201 denotes a switching TFT, which comprises an active layer 56, a gate electrode 57a, a gate wiring 57b, a source wiring 58, and a drain wiring 59. Further, reference numeral 1202 denotes a current control TFT, which comprises an active layer 60, a gate electrode 61, a source wiring (current supply line) 62, and a drain wiring 63 are included in its constitution. The source wiring 62 of the current control TFT 1202 is connected to a current supply line 64, and the drain wiring 63 is connected to an EL element 65. Fig. 12B shows the circuit composition of this pixel.

[0183] The point of difference between Fig. 12A and Fig. 2A is the structure of the switching TFT. In embodiment 4 the gate electrode 57a is formed with a fine line width between 0.1 and 5  $\mu\text{m}$ , and the active layer 56 is formed so as to transverse that portion. The gate wiring 57b is formed so as to electrically connect the gate electrode 57a of each pixel. A triple gate structure which does not monopolize much surface area is thus realized.

[0184] Other portions are similar to those of Fig. 2A, and the effective emitting surface area becomes larger because the surface area exclusively used by the switching TFT becomes smaller if the structure of embodiment 4 is employed. In other words, the image brightness is increased. Furthermore, a gate structure in which redundancy is increased in order to reduce the value of the off current can be realized, and therefore the image quality can be increased even further.

[0185] Note that, in the constitution of embodiment 4, the current supply line 64 can be made common between neighboring pixels, as in embodiment 2, and that a structure like that of embodiment 3 may also be used. Furthermore, processes of manufacturing may be performed in accordance with those of embodiment 1.

Embodiment 5

[0186] Cases in which a top gate type TFT is used are explained in embodiments 1 to 4, and the present invention may also be implemented using a bottom gate type TFT. A case of implementing the present invention by using a reverse stagger type TFT is explained in embodiment 5 using Fig. 13. Note that, except for the structure of the TFT, the structure is the same as that of Fig. 1, and therefore the same symbols as those of Fig. 1 are used when necessary.

[0187] In Fig. 13, the similar materials as those of Fig. 1 can be used in the substrate 11 and in the base film 12. A switching TFT 1301 and a current control TFT 1302 are then formed on the base film 12.

[0188] The switching TFT 1301 comprises: gate electrodes 70a and 70b; a gate wiring 71; a gate insulating film 72; a source region 73; a drain region 74; LDD regions 75a to 75d; a high concentration impurity region 76; channel forming regions 77a and 77b; channel protecting films 78a and 78b; a first interlayer insulating film 79; a source wiring 80; and a drain wiring 81.

[0189] Further, the current control TFT 1302 comprises: a gate electrode 82; the gate insulating film 72; a source region 83; a drain region 84; an LDD region 85; a channel forming region 86; a channel protecting film 87; a first interlayer insulating film 79; a source wiring 88; and a drain wiring 89. The gate electrode 82 is electrically connected to the drain wiring 81 of the switching TFT 1301 at this point.

[0190] Note that the above switching TFT 1301 and the current control TFT 1302 may be formed in accordance with a known method of manufacturing a reverse stagger type TFT. Further, similar materials used in corresponding portions of the top gate type TFTs of embodiment 1 can be used for the materials of each portion (such as wirings, insulating films, and active layers) formed in the above TFTs. Note that the channel protecting films 78a, 78b, and 87, which are not in the constitution of the top gate type TFT, may be formed by an insulating film containing silicon. Furthermore, regarding the formation of impurity regions such as the source regions, the drain regions, and the LDD regions, they may be formed by using a photolithography technique and individually changing the impurity concentration.

[0191] When the TFTs are completed, a pixel having an EL element 1303 in which the first passivation film 41, the color filter 42, the fluorescent substance 43, the second interlayer insulating film (leveling film) 44, the second passivation film 45, the pixel electrode (anode) 46, the EL layer 47, the MgAg electrode (cathode) 48, the aluminum electrode (protecting film) 49, and the third passivation film 50 are formed in order, is completed. Embodiment 1 may be referred to with respect to manufacturing processes and materials for the above.

[0192] Note that it is possible to freely combine the constitution of embodiment 5 with the constitution of any of embodiments 2 to 4.

Embodiment 6

[0193] It is effective to use a material having a high thermal radiating effect, similar to that of the second passivation film 45, as the base film formed between the active layer and the substrate in the structures of Fig. 5C of embodiment

1 or Fig. 1. In particular, a large amount of current flows in the current control TFT, and therefore heat is easily generated, and deterioration due to self generation of heat can become a problem. Thermal deterioration of the TFT can be prevented by using the base film of embodiment 6, which has a thermal radiating effect, for this type of case.

**[0194]** The effect of protecting from the diffusion of mobile ions from the substrate is also very important, of course, and therefore it is preferable to use a lamination structure of a compound including Si, Al, N, O, and M, and an insulating film containing silicon, similar to the first passivation film 41.

**[0195]** Note that it is possible to freely combine the constitution of embodiment 6 with the constitution of any of embodiments 1 to 5.

#### Embodiment 7

**[0196]** When the pixel structure shown in embodiment 3 is used, the light emitted from the EL layer is radiated in the direction opposite to the substrate, and therefore it is not necessary to pay attention to the transmissivity of materials, such as the insulating film, which exist between the substrate and the pixel electrode. In other words, materials which have a somewhat low transmissivity can also be used.

**[0197]** It is therefore advantageous to use a carbon film, such as one referred to as a diamond thin film, a diamond-like carbon film, or an amorphous carbon film, as the base film 12, the first passivation film 41 or the second passivation film 45. In other words, because it is not necessary to worry about lowering the transmissivity, the film thickness can be set thick, to between 100 and 500 nm, and it is possible to have a very high thermal radiating effect.

**[0198]** Regarding the use of the above carbon films in the third passivation film 50, note that a reduction in the transmissivity must be avoided, and therefore it is preferable to set the film thickness to between 5 and 100 nm.

**[0199]** Note that, in embodiment 7, it is effective to laminate with another insulating film when a carbon film is used in any of the base film 12, the first passivation film 41, the second passivation film 45, or the third passivation film 50.

**[0200]** In addition, embodiment 7 is effective when the pixel structure shown in embodiment 3 is used, and for other constitutions, it is possible to freely combine the constitution of embodiment 7 with the constitution of any of embodiments 1 to 6.

#### Embodiment 8

**[0201]** The amount of the off current value in the switching TFT in the pixel of the EL display device is reduced by using a multi-gate structure for the switching TFT, and the present invention is characterized by the elimination of the need for a storage capacitor. This is a device for making good use of the surface area, reserved for the storage capacitor, as an emitting region.

**[0202]** However, even if the storage capacitor is not completely eliminated, an effect of increasing the effective emitting surface area, by the amount that the exclusive surface area is made smaller, can be obtained. In other words, the object of the present invention can be sufficiently achieved by reducing the value of the off current by using a multi-gate structure for the switching TFT, and by only shrinking the exclusive surface area of the storage capacitor.

**[0203]** It is therefore possible to use a pixel structure such as that shown in Fig. 14. Note that, when necessary, the same symbols are used in Fig. 14 as in Fig. 1.

**[0204]** The different point between Fig. 14 and Fig. 1 is the existence of a storage capacitor 1401 connected to the switching TFT. The storage capacitor 1401 is formed by a semiconductor region (lower electrode) extended from the drain region 14 of the switching TFT 201, the gate insulating film 18, and a capacitor electrode (upper electrode) 1403. The capacitor electrode 1403 is formed at the same time as the gate electrodes 19a, 19b, and 35 of the TFT.

**[0205]** A top view is shown in Fig. 15A. The cross sectional diagram taken along the line A-A' in the top view of Fig. 15A corresponds to Fig. 14. As shown in Fig. 15A, the capacitor electrode 1403 is electrically connected to the source region 31 of the current control TFT through a connecting wiring 1404 which is electrically connected to the capacitor electrode 1403. Note that the connection wiring 1404 is formed at the same time as the source wirings 21 and 36, and the drain wirings 22 and 37. Furthermore, Fig. 15B shows the circuit constitution of the top view shown in Fig. 15A.

**[0206]** Note that the constitution of embodiment 8 can be freely combined with the constitution of any of embodiments 1 to 7. In other words, only the storage capacitor is formed within the pixel, no limitations are added with regard to the TFT structure or the EL layer materials.

#### Embodiment 9

**[0207]** Laser crystallization is used as the means of forming the crystalline silicon film 302 in embodiment 1, and a case of using a different means of crystallization is explained in embodiment 9.

**[0208]** After forming an amorphous silicon film in embodiment 9, crystallization is performed using the technique recorded in Japanese Patent Application Laid-open No. Hei 7-130652. The technique recorded in the above patent

application is one of obtaining a crystalline silicon film having good crystallinity by using an element such as nickel as a catalyst for promoting crystallization.

**[0209]** Further, after the crystallization process is completed, a process of removing the catalyst used in the crystallization may be performed. In this case, the catalyst may be gettered using the technique recorded in Japanese Patent Application Laid-open No. Hei 10-270363 or Japanese Patent Application Laid-open No. Hei 8-330602.

**[0210]** In addition, a TFT may be formed using the technique recorded in the specification of Japanese Patent Application No. Hei 11-076967 by the applicant of the present invention.

**[0211]** The processes of manufacturing shown in embodiment 1 are one embodiment of the present invention, and provided that the structure of Fig. 1 or of Fig. 5C of embodiment 1 can be realized, then other manufacturing process may also be used without any problems, as above.

**[0212]** Note that it is possible to freely combine the constitution of embodiment 9 with the constitution of any of embodiments 1 to 8.

#### Embodiment 10

**[0213]** In driving the EL display device of the present invention, analog driving can be performed using an analog signal as an image signal, and digital driving can be performed using a digital signal.

**[0214]** When analog driving is performed, the analog signal is sent to a source wiring of a switching TFT, and the analog signal, which contains gray scale information, becomes the gate voltage of a current control TFT. The current flowing in an EL element is then controlled by the current control TFT, the EL element emitting intensity is controlled, and gray scale display is performed. In this case, it is preferable to operate the current control TFT in a saturation region. In other words, it is preferable to operate the TFT within the conditions of  $|V_{ds}| > |V_{gs} - V_{th}|$ . Note that  $V_{ds}$  is the voltage difference between a source region and a drain region,  $V_{gs}$  is the voltage difference between the source region and a gate electrode, and  $V_{th}$  is the threshold voltage of the TFT.

**[0215]** On the other hand, when digital driving is performed, it differs from the analog type gray scale display, and gray scale display is performed by time division driving (time ratio gray scale driving) or surface area ratio gray scale driving. Namely, by regulating the length of the emission time or the ratio of emitting surface area, color gray scales can be made to be seen visually as changing. In this case, it is preferable to operate the current control TFT in the linear region. In other words, it is preferable to operate the TFT within the conditions of  $|V_{ds}| < |V_{gs} - V_{th}|$ .

**[0216]** The EL element has an extremely fast response speed in comparison to a liquid crystal element, and therefore it is possible to have high speed driving. Therefore, the EL element is one which is suitable for time ratio gray scale driving, in which one frame is partitioned into a plural number of subframes and then gray scale display is performed. Furthermore, it has the advantage of the period of one frame being short, and therefore the amount of time for which the gate voltage of the current control TFT is maintained is also short, and a storage capacitor can be made smaller or eliminated.

**[0217]** The present invention is a technique related to the element structure, and therefore any method of driving it may thus be used.

#### Embodiment 11

**[0218]** In embodiment 11, examples of the pixel structure of the EL display device of the present invention are shown in Figs. 21A and 21B. Note that in embodiment 11, reference numeral 4701 denotes a source wiring of a switching TFT 4702, reference numeral 4703 denotes a gate wiring of the switching TFT 4702, reference numeral 4704 denotes a current control TFT, 4705 denotes an electric current supply line, 4706 denotes a power source control TFT, 4707 denotes a power source control gate wiring, and 4708 denotes an EL element. Japanese Patent Application No. Hei 11-341272 may be referred to regarding the operation of the power source control TFT 4706.

**[0219]** Further, in embodiment 11 the power source control TFT 4706 is formed between the current control TFT 4704 and the EL element 4708, but a structure in which the current control TFT 4704 is formed between the power source control TFT 4706 and the EL element 4708 may also be used. In addition, it is preferable for the power source control TFT 4706 to have the same structure as the current control TFT 4704, or for both to be formed in series by the same active layer.

**[0220]** Fig. 21A is an example of a case in which the electric current supply line 4705 is common between two pixels. Namely, this is characterized in that the two pixels are formed having linear symmetry around the electric current supply line 4705. In this case, the number of electric current supply lines can be reduced, and therefore the pixel portion can be made even more high precision.

**[0221]** Furthermore, Fig. 21B is an example of a case in which an electric current supply line 4710 is formed parallel to the gate wiring 4703, and in which a power source control gate wiring 4711 is formed parallel to the source wiring 4701. Note that in Fig. 23B, the structure is formed such that the electric current supply line 4710 and the gate wiring

4703 do not overlap, but provided that both are wirings formed on different layers, then they can be formed to overlap, sandwiching an insulating film. In this case, the exclusive surface area of the electric current supply line 4710 and the gate wiring 4703 can be shared, and the pixel section can be made even more high precision.

## Embodiment 12

[0222] In embodiment 12, examples of the pixel structure of the EL display device of the present invention are shown in Figs. 22A and 22B. Note that in embodiment 12, reference numeral 4801 denotes a source wiring of a switching TFT 4802, reference numeral 4803 denotes a gate wiring of the switching TFT 4802, reference numeral 4804 denotes a current control TFT, 4805 denotes an electric current supply line, 4806 denotes an erasure TFT, 4807 denotes an erasure gate wiring, and 4808 denotes an EL element. Japanese Patent Application No. Hei 11-338786 may be referred to regarding the operation of the erasure TFT 4806.

[0223] The drain of the erasure TFT 4806 is connected to a gate of the current control TFT 4804, and it becomes possible to forcibly change the gate voltage of the current control TFT 4804. Note that an n-channel TFT or a p-channel TFT may be used for the erasure TFT 4806, but it is preferable to make it the same structure as the switching TFT 4802 so that the off current value can be made smaller.

[0224] Fig. 22A is an example of a case in which the electric current supply line 4805 is common between two pixels. Namely, this is characterized in that the two pixels are formed having linear symmetry around the electric current supply line 4805. In this case, the number of electric current supply lines can be reduced, and therefore the pixel section can be made even more high precision.

[0225] In addition, Fig. 22B is an example of a case in which an electric current supply line 4810 is formed parallel to the gate wiring 4803, and in which an erasure gate wiring 4811 is formed parallel to the source wiring 4801. Note that in Fig. 22B, the structure is formed such that the electric current supply line 4810 and the gate wiring 4803 do not overlap, but provided that both are wirings formed on different layers, then they can be formed to overlap, sandwiching an insulating film. In this case, the exclusive surface area of the electric current supply line 4810 and the gate wiring 4803 can be shared, and the pixel section can be made even more high precision.

## Embodiment 13

[0226] The EL display device of the present invention may have a structure in which several TFTs are formed within a pixel. In embodiments 11 and 12, examples of forming three TFTs are shown, but from 4 to 6 TFTs may also be formed. It is possible to implement the present invention without placing any limitations on the structure of the pixels of the EL display device.

## Embodiment 14

[0227] An example of using a p-channel TFT as the current control TFT 202 of Fig. 1 is explained in embodiment 14. Note that other portions are the same as those of Fig. 1, and therefore a detailed explanation of the other portions is omitted.

[0228] A cross sectional structure of the pixel of embodiment 14 is shown in Fig. 23. Embodiment 1 may be referred to for a method of manufacturing the p-channel TFT used in embodiment 14. An active layer of the p-channel TFT comprises a source region 2801, a drain region 2802, and a channel forming region 2803, and the source region 2801 is connected to the source wiring 36, and the drain region 2802 is connected to the drain wiring 37.

[0229] For cases in which the anode of an EL element is connected to the current control TFT, it is preferable to use the p-channel TFT as the current control TFT.

[0230] Note that it is possible to implement the constitution of embodiment 14 by freely combining it with the constitution of any of embodiments 1 to 13.

## Embodiment 15


[0231] By using an EL material in which phosphorescence from a triplet state exciton can be utilized in light emission in embodiment 15, the external emission quantum efficiency can be increased by a great amount. By doing so, it becomes possible to make the EL element into a low power consumption, long life, and low weight EL element.

[0232] Reports of utilizing triplet state excitons and increasing the external emission quantum efficiency is shown in the following papers.

[0233] Tsutsui, T., Adachi, C., and Saito, S., Photochemical Processes in Organized Molecular Systems, Ed. Honda, K., (Elsevier Sci. Pub., Tokyo, 1991), p. 437.

[0234] The molecular formula of the EL material (coumarin pigment) reported in the above paper is shown below.


## [Chem 8]



[0235] Baldo, M. A., O'Brien, D. F., You, Y., Shoustikov, A., Sibley, S., Thompson, M. E., and Forrest, S. R., Nature 395 (1998) p. 151.

[0236] The molecular formula of the EL material (Pt complex) reported in the above paper is shown below.

## [Chem 9]




[0237] Baldo, M. A., Lamansky, S., Burrows, P. E., Thompson, M. E., and Forrest, S. R., Appl. Phys. Lett., 75 (1999) p. 4.

[0238] Tsutui, T., Yang, M.J., Yahiro, M., Nakamura, K., Watanabe, T., Tsuji, T., Fukuda, Y., Wakimoto, T., Mayaguchi, S., Jpn. Appl. Phys., 38 (12B) (1999) L1502.

[0239] The molecular formula of the EL material (Ir complex) reported in the above paper is shown below.

## [Chem 10]



[0240] Provided that the phosphorescence emission from triplet state excitons can be utilized, then in principle it is possible to realize an external emission quantum efficiency which is 3 to 4 times higher than that for cases of using the fluorescence emission from singlet state excitons. Note that it is possible to implement the constitution of embodiment 15 by freely combining it with the constitution of any of embodiments 1 to 14.

Embodiment 16

[0241] In embodiment 1 it is preferable to use an organic EL material as an EL layer, but the present invention can

also be implemented using an inorganic EL material. However, current inorganic EL materials have an extremely high driving voltage, and therefore a TFT which has voltage resistance characteristics that can withstand the driving voltage must be used in cases of performing analog driving.

**[0242]** Alternatively, if inorganic EL materials having lower driving voltages than conventional inorganic EL materials are developed, then it is possible to apply them to the present invention.

**[0243]** Further, it is possible to freely combine the constitution of embodiment 16 with the constitution of any of embodiments 1 to 14.

#### Embodiment 17

**[0244]** An active matrix type EL display device (EL module) formed by implementing the present invention has superior visibility in bright locations in comparison to a liquid crystal display device because it is a self-emitting type device. It therefore has a wide range of uses as a direct-view type EL display (indicating a display incorporating an EL module).

**[0245]** Note that a wide viewing angle can be given as one advantage which the EL display has over a liquid crystal display. The EL display of the present invention may therefore be used as a display (display monitor) having a diagonal equal to 30 inches or greater (typically equal to 40 inches or greater) for appreciation of TV broadcasts by large screen.

**[0246]** Further, not only can it be used as an EL display (such as a personal computer monitor, a TV broadcast reception monitor, or an advertisement display monitor), it can be used as a display for various electronic devices.

**[0247]** The following can be given as examples of such electronic devices: a video camera; a digital camera; a goggle type display (head mounted display); a car navigation system; a personal computer; a portable information terminal (such as a mobile computer, a mobile telephone, or an electronic book); and an image playback device using a recording medium (specifically, a device which performs playback of a recording medium and is provided with a display which can display those images, such as a compact disk (CD), a laser disk (LD), or a digital video disk (DVD)). Examples of these electronic devices are shown in Figs. 16A to 16F.

**[0248]** Fig. 16A is a personal computer, comprising a main body 2001, a casing 2002, a display portion 2003, and a keyboard 2004. The present invention can be used in the display portion 2003.

**[0249]** Fig. 16B is a video camera, comprising a main body 2101, a display portion 2102, an audio input portion 2103, operation switches 2104, a battery 2105, and an image receiving portion 2106. The present invention can be used in the display portion 2102.

**[0250]** Fig. 16C is a goggle display, comprising a main body 2201, a display portion 2202, and an arm portion 2203. The present invention can be used in the display portion 2202.

**[0251]** Fig. 16D is a mobile computer, comprising a main body 2301, a camera portion 2302, an image receiving portion 2303, operation switches 2304, and a display portion 2305. The present invention can be used in the display portion 2305.

**[0252]** Fig. 16E is an image playback device (specifically, a DVD playback device) provided with a recording medium, comprising a main body 2401, a recording medium (such as a CD, an LD, or a DVD) 2402, operation switches 2403, a display portion (a) 2404, and a display portion (b) 2405. The display portion (a) is mainly used for displaying image information, and the image portion (b) is mainly used for displaying character information, and the present invention can be used in the image portion (a) and in the image portion (b). Note that the present invention can be used as an image playback device provided with a recording medium in devices such as a CD playback device and game equipment.

**[0253]** Fig. 16F is an EL display, containing a casing 2501, a support stand 2502, and a display portion 2503. The present invention can be used in the display portion 2503. The EL display of the present invention is especially advantageous for cases in which the screen is made large, and is favorable for displays having a diagonal greater than or equal to 10 inches (especially one which is greater than or equal to 30 inches).

**[0254]** Furthermore, if the emission luminance of EL materials becomes higher in future, then it will become possible to use the present invention in a front type or a rear type projector.

**[0255]** The above electronic devices are becoming more often used to display information provided through an electronic transmission circuit such as the Internet or CATV (cable television), and in particular, opportunities for displaying animation information are increasing. The response speed of EL materials is extremely high, and therefore EL displays are suitable for performing this type of display.

**[0256]** The emitting portion of the EL display device consumes power, and therefore it is preferable to display information so as to have the emitting portion become as small as possible. Therefore, when using the EL display device in a display portion which mainly displays character information, such as a portable information terminal, in particular, a portable telephone or a car audio system, it is preferable to drive it by setting non-emitting portions as background and forming character information in emitting portions.

**[0257]** Fig. 20A is a portable telephone, comprising a main body 2601, an audio output portion 2602, an audio input

portion 2603, a display portion 2604, operation switches 2605, and an antenna 2606. The EL display device of the present invention can be used in the display portion 2604. Note that by displaying white characters in a black background in the display portion 2604, the power consumption of the portable telephone can be reduced.

**[0258]** Fig. 20B is an on-board audio system (car audio system), containing a main body 2701, a display portion 2702, and operation switches 2703 and 2704. The EL display device of the present invention can be used in the display portion 2702. Furthermore, an on-board audio system is shown in embodiment 17, but a desktop type audio system may also be used. Note that by displaying white characters in a black background in the display portion 2702, the power consumption can be reduced.

**[0259]** The range of applications of the present invention is thus extremely wide, and it is possible to apply the present invention to electronic devices in all fields. Furthermore, the electronic devices of embodiment 17 can be realized by using any constitution of any combination of embodiments 1 to 16.

**[0260]** By using the present invention the EL elements are prevented from degrading by moisture and heat. Further, giving bad influence on TFT characteristic by diffusion of alkaline metals from the EL layer is prevented. As a result, the operating performance and the reliability of the EL display devices can be greatly improved.

**[0261]** Further, it becomes possible to produce application products (electronic devices) having good image quality and durability (reliability is high) by comprising such EL display device as a display.

## Claims

1. An electro-optical device wherein an EL element is in contact with an insulating film including at least one of the elements selected from a group consisting of B (boron), C (carbon), N (nitrogen) and at least one of the elements selected from a group consisting of Al (aluminum), Si (silicon) and P (phosphorus).
2. An electro-optical device wherein an EL element is in contact with an insulating film comprising one selected from a group consisting of aluminum nitride, silicon carbide, silicon nitride, boron nitride, boron phosphate and aluminum oxide.
3. An electro-optical device wherein an EL element is in contact with an insulating film comprising Si, Al, N, O and M where M is a rare earth element, preferably one selected from a group consisting of Ce (cerium), Yb (ytterbium), Sm (samarium), Er (erbium), Y (yttrium), (La) lanthanum, Gd (gadolinium), Dy (dysprosium) and Nd (neodymium).
4. An electro-optical device wherein an EL element is in contact with a carbon film.
5. An electro-optical device according to claim 4 wherein the carbon film is a diamond film or a diamond-like-carbon film.
6. An electro-optical device in which an EL element is enclosed by insulating films that comprise an element selected from a group consisting of B (boron), C (carbon) and N (nitrogen) and an element selected from a group consisting of Al (aluminum), Si (silicon) and P (phosphorus).
7. An electro-optical device wherein an EL element is enclosed by insulating films that comprise one selected from a group consisting of aluminum nitride, silicon carbide, silicon nitride, boron nitride, boron phosphate and aluminum oxide.
8. An electro-optical device wherein an EL element is enclosed by insulating films that comprise Si, Al, N, O and M where M is a rare earth element, preferably one selected from a group consisting of Ce (cerium), Yb (ytterbium), Sm (samarium), Er (erbium), Y (yttrium), (La) lanthanum, Gd (gadolinium), Dy (dysprosium) and Nd (neodymium).
9. An electro-optical device wherein an EL element is enclosed by carbon films.
10. An electro-optical device according to claim 9 wherein the carbon films are a diamond film or a diamond-like-carbon film.
11. A device according to claim 1 wherein the EL element is electrically connected to a second TFT which has a gate electrically connected to a first TFT.
12. A device according to claim 2 wherein the EL element is electrically connected to a second TFT which has a gate



electrically connected to a first TFT.

13. A device according to claim 3 wherein the EL element is electrically connected to a second TFT which has a gate electrically connected to a first TFT.

14. A device according to claim 4 wherein the EL element is electrically connected to a second TFT which has a gate electrically connected to a first TFT.

15. A device according to claim 5 wherein the EL element is electrically connected to a second TFT which has a gate electrically connected to a first TFT.

16. A device according to claim 6 wherein the EL element is electrically connected to a second TFT which has a gate electrically connected to a first TFT.

17. A device according to claim 7 wherein the EL element is electrically connected to a second TFT which has a gate electrically connected to a first TFT.

18. A device according to claim 8 wherein the EL element is electrically connected to a second TFT which has a gate electrically connected to a first TFT.

19. A device according to claim 9 wherein the EL element is electrically connected to a second TFT which has a gate electrically connected to a first TFT.

20. A device according to claim 11 wherein the first TFT is a switching element and the second TFT is a current controlling element.

21. A device according to claim 12 wherein the first TFT is a switching element and the second TFT is a current controlling element.

22. A device according to claim 13 wherein the first TFT is a switching element and the second TFT is a current controlling element.

23. A device according to claim 14 wherein the first TFT is a switching element and the second TFT is a current controlling element.

24. A device according to claim 15 wherein the first TFT is a switching element and the second TFT is a current controlling element.

25. A device according to claim 16 wherein the first TFT is a switching element and the second TFT is a current controlling element.

26. A device according to claim 17 wherein the first TFT is a switching element and the second TFT is a current controlling element.

27. A device according to claim 18 wherein the first TFT is a switching element and the second TFT is a current controlling element.

28. A device according to claim 19 wherein the first TFT is a switching element and the second TFT is a current controlling element.

29. A device according to claim 1 wherein the insulating film is disposed in a laminate with silicon oxide film, silicon nitride film or a silicon oxynitride film.

30. A device according to claim 2 wherein the insulating film is disposed in a laminate with silicon oxide film, silicon nitride film or a silicon oxynitride film.

31. A device according to claim 3 wherein the insulating film is disposed in a laminate with silicon oxide film, silicon nitride film or a silicon oxynitride film.

32. A device according to claim 4 wherein the insulating film is disposed in a laminate with silicon oxide film, silicon nitride film or a silicon oxynitride film.
- 5 33. A device according to claim 5 wherein the insulating film is disposed in a laminate with silicon oxide film, silicon nitride film or a silicon oxynitride film.
34. A device according to claim 6 wherein the insulating film is disposed in a laminate with silicon oxide film, silicon nitride film or a silicon oxynitride film.
- 10 35. A device according to claim 7 wherein the insulating film is disposed in a laminate with silicon oxide film, silicon nitride film or a silicon oxynitride film.
36. A device according to claim 8 wherein the insulating film is disposed in a laminate with silicon oxide film, silicon nitride film or a silicon oxynitride film.
- 15 37. A device according to claim 9 wherein the insulating film is disposed in a laminate with silicon oxide film, silicon nitride film or a silicon oxynitride film.
- 20 38. A device according to claim 1 wherein the EL element is formed over a resin film and an insulating film is disposed between the resin film and the EL element.
39. A device according to claim 2 wherein the EL element is formed over a resin film and an insulating film is disposed between the resin film and the EL element.
- 25 40. A device according to claim 3 wherein the EL element is formed over a resin film and an insulating film is disposed between the resin film and the EL element.
41. A device according to claim 4 wherein the EL element is formed over a resin film and an insulating film is disposed between the resin film and the EL element.
- 30 42. A device according to claim 5 wherein the EL element is formed over a resin film and an insulating film is disposed between the resin film and the EL element.
43. A device according to claim 6 wherein the EL element is formed over a resin film and an insulating film is disposed between the resin film and the EL element.
- 35 44. A device according to claim 7 wherein the EL element is formed over a resin film and an insulating film is disposed between the resin film and the EL element.
- 40 45. A device according to claim 8 wherein the EL element is formed over a resin film and an insulating film is disposed between the resin film and the EL element.
46. A device according to claim 9 wherein the EL element is formed over a resin film and an insulating film is disposed between the resin film and the EL element.
- 45 47. An electronic device which comprises an electro-optical device according to claim 1.
48. A device according to claim 11 wherein the first TFT and the second TFT are disposed on an insulating film, wherein the insulating film is an insulating film that comprises at least an element selected from a group consisting of B (boron), C (carbon) and N (nitrogen) and an element selected from a group consisting of Al (aluminum), Si (silicon) and P (phosphorus), or an insulating film that comprises Si, Al, N, O and M where M is a rare earth element preferably one selected from a group consisting of Ce (cerium), Yb (ytterbium), Sm (samarium), Er (erbium), Y (yttrium), (La) lanthanum, Gd (gadolinium), Dy (dysprosium) and Nd (neodymium).
- 50 49. A method for manufacturing an electro-optical device comprising the steps of:
- 55 forming a plurality of TFTs over a substrate;  
forming an insulating film that cover the plurality of TFTs;

forming a passivation film over the insulating film; and  
forming an EL element over the passivation film.

50. A method according to claim 49 wherein the insulating film comprises a resin film.

51. A method according to claim 49 wherein the passivation film comprises an insulating film that comprises at least an element selected from a group consisting of B (boron), C (carbon) and N (nitrogen) and an element selected from a group consisting of Al (aluminum), Si (silicon) and P (phosphorus), or an insulating film that comprises Si, Al, N, O and M where M is a rare earth element preferably one selected from a group consisting of Ce (cerium), Yb (ytterbium), Sm (samarium), Er (erbium), Y (yttrium), (La) lanthanum, Gd (gadolinium), Dy (dysprosium) and Nd (neodymium).

52. A method for manufacturing an electro-optical device comprising the steps of:

forming a plurality of TFTs over a substrate;  
forming an insulating film that covers the plurality of TFTs;  
forming a first passivation film over the insulating film;  
forming an EL element over the first passivation film; and  
forming a second passivation film that covers the EL element,  
wherein the EL element is enclosed by the first passivation film and the second passivation film.

53. A method according to claim 52 wherein the insulating film comprises a resin film.

54. A method according to claim 52 wherein the first passivation film and the second passivation film comprises at least an element selected from a group consisting of B (boron), C (carbon) and N (nitrogen) and an element selected from a group consisting of Al (aluminum), Si (silicon) and P (phosphorus).

55. A method according to claim 52 wherein the first passivation film and the second passivation film comprises Si, Al, N, O and M where M is a rare earth element preferably one selected from a group consisting of Ce (cerium), Yb (ytterbium), Sm (samarium), Er (erbium), Y (yttrium), (La) lanthanum, Gd (gadolinium), Dy (dysprosium) and Nd (neodymium).

56. A method according to claim 49 further comprising a step of forming an insulating film that comprises at least an element selected from a group consisting of B (boron), C (carbon) and N (nitrogen) and an element selected from a group consisting of Al (aluminum), Si (silicon) and P (phosphorus), between the substrate and the plurality of TFTs.

57. A method according to claim 52 further comprising a step of forming an insulating film that comprises at least an element selected from a group consisting of B (boron), C (carbon) and N (nitrogen) and an element selected from a group consisting of Al (aluminum), Si (silicon) and P (phosphorus), between the substrate and the plurality of TFTs.

58. A method according to claim 49 further comprising a step of forming an insulating film that comprises Si, Al, N, O and M where M is a rare earth element preferably one selected from a group consisting of Ce (cerium), Yb (ytterbium), Sm (samarium), Er (erbium), Y (yttrium), (La) lanthanum, Gd (gadolinium), Dy (dysprosium) and Nd (neodymium), between the substrate and the plurality of TFTs.

59. A method according to claim 52 further comprising a step of forming an insulating film that comprises Si, Al, N, O and M where M is a rare earth element preferably one selected from a group consisting of Ce (cerium), Yb (ytterbium), Sm (samarium), Er (erbium), Y (yttrium), (La) lanthanum, Gd (gadolinium), Dy (dysprosium) and Nd (neodymium), between the substrate and the plurality of TFTs.

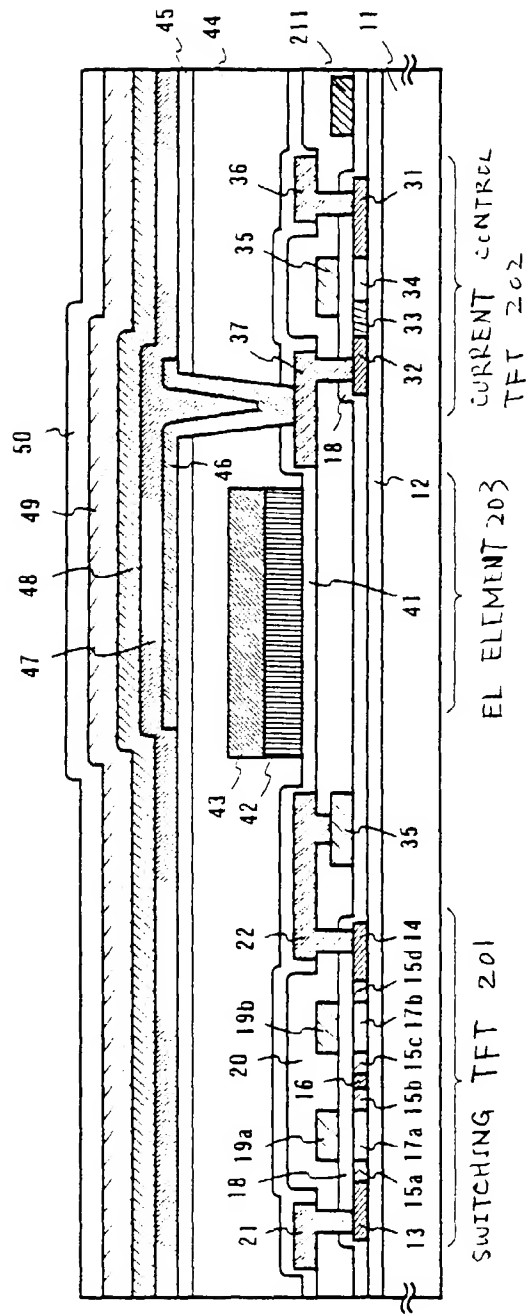


Fig. 1

Fig. 2A

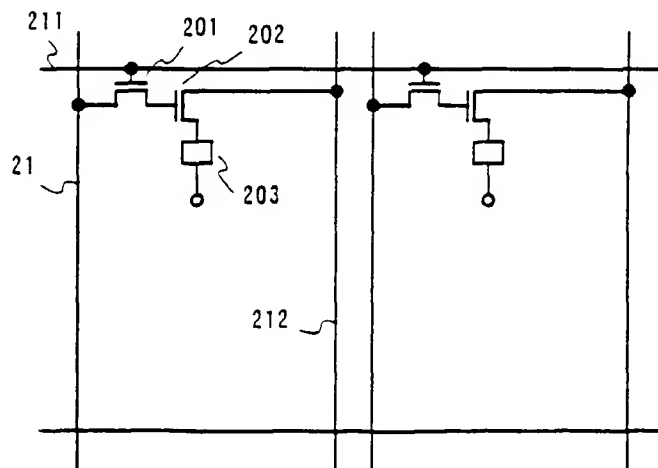
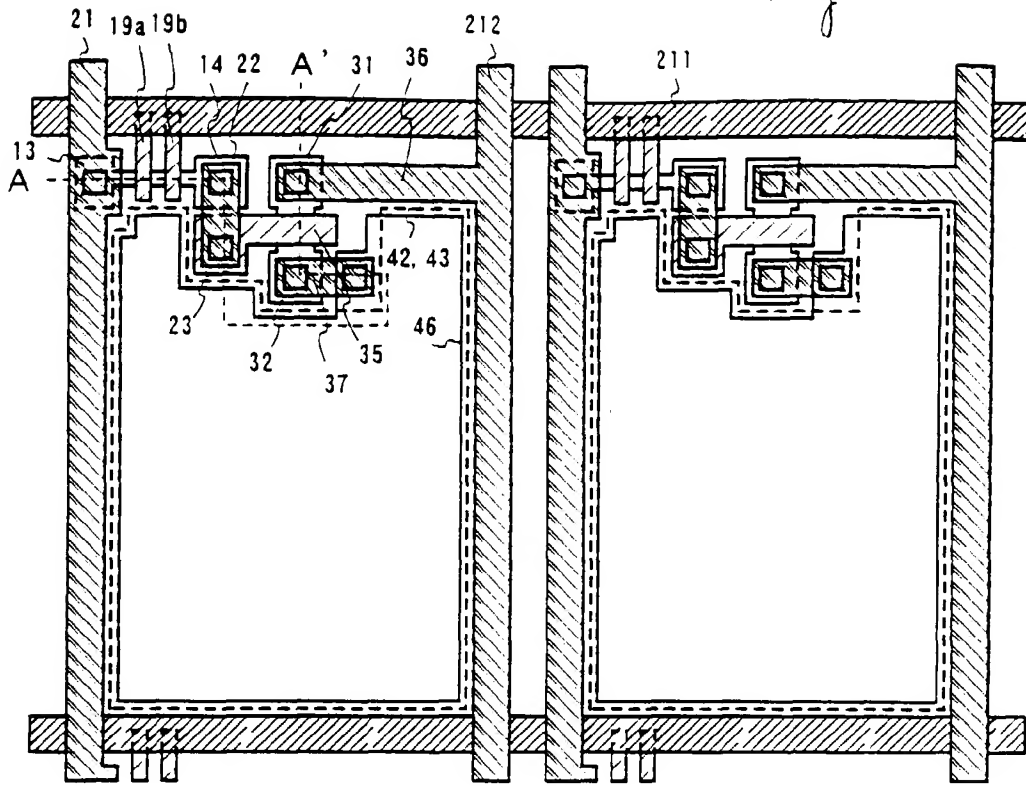


Fig. 2B

Fig. 3A CRYSTALLIZATION STEP

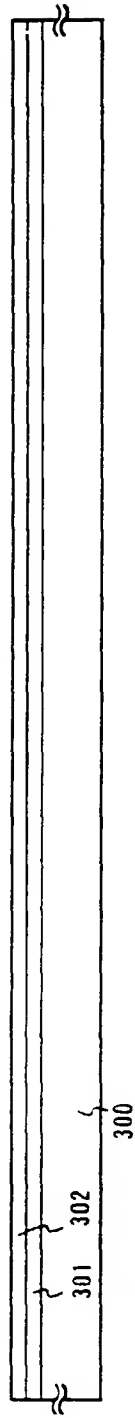


Fig. 3B STEP OF ADDING N-TYPE IMPURITY ELEMENT

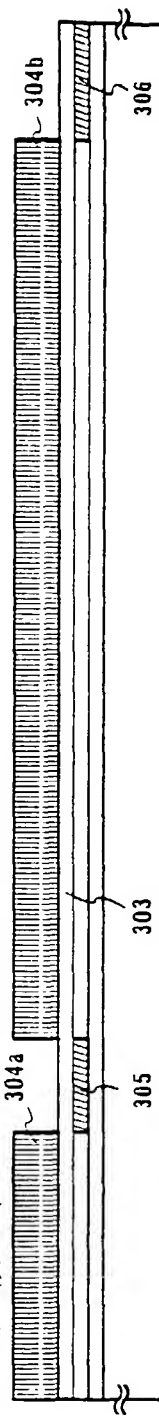


Fig. 3C LASER ANNEALING STEP




Fig. 3D





Fig. 3E

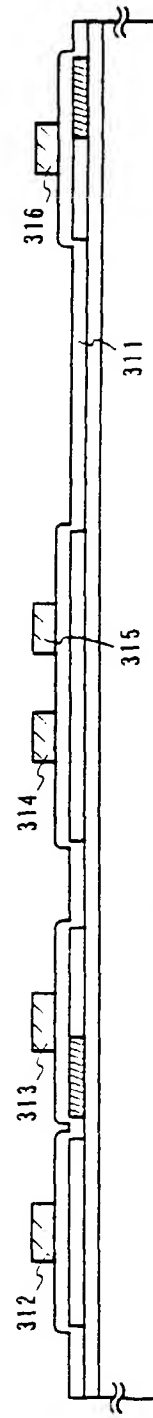

STEP OF ADDING N-TYPE IMPURITY ELEMENT

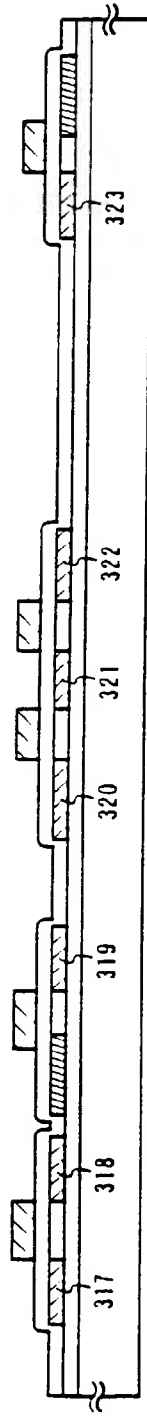


Fig. 4A

STEP OF ADDING N-TYPE IMPURITY ELEMENT

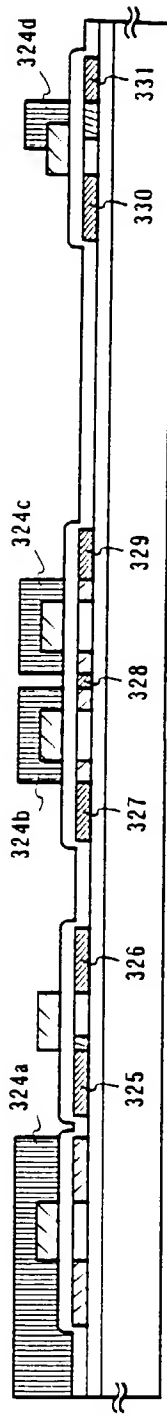


Fig. 4B

STEP OF ADDING P-TYPE IMPURITY ELEMENT

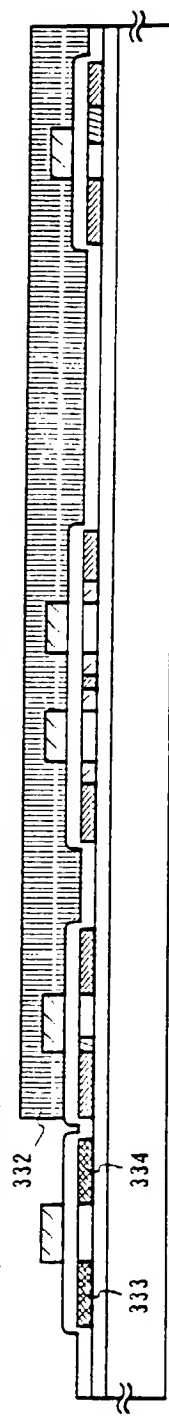


Fig. 4C

335

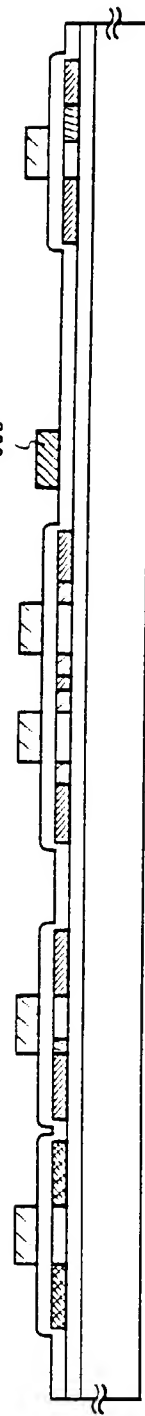
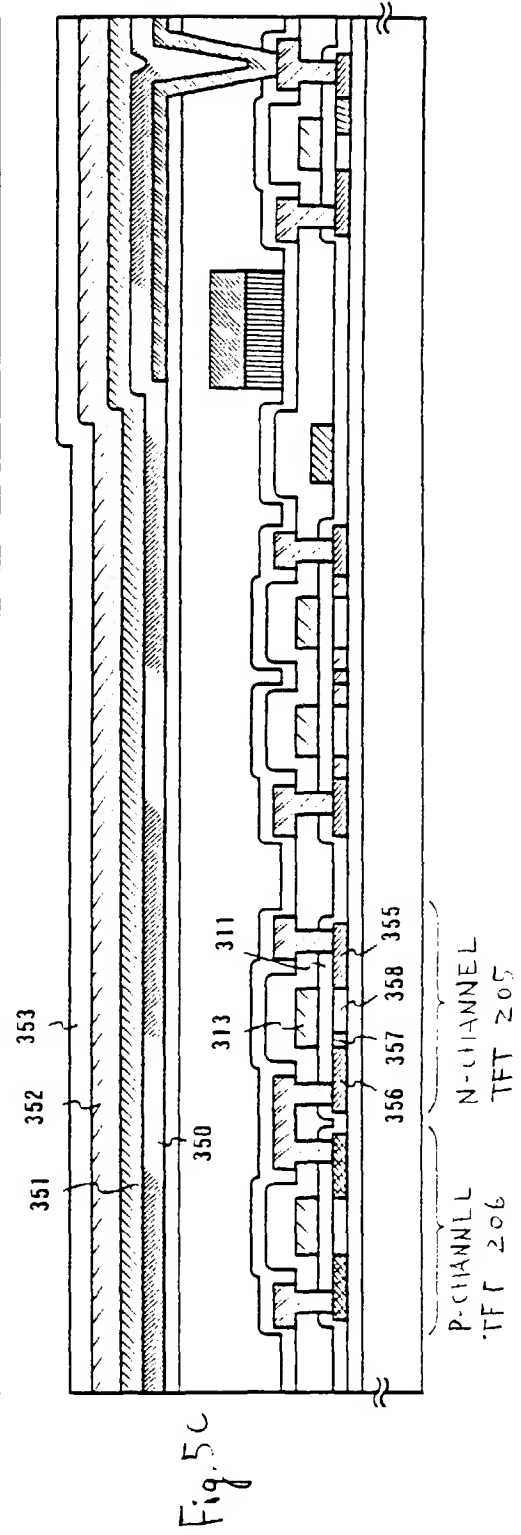
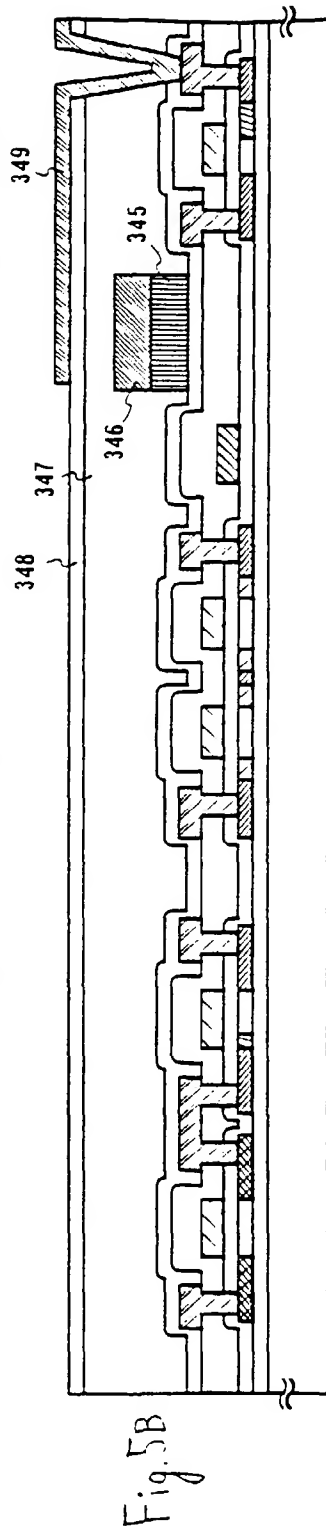
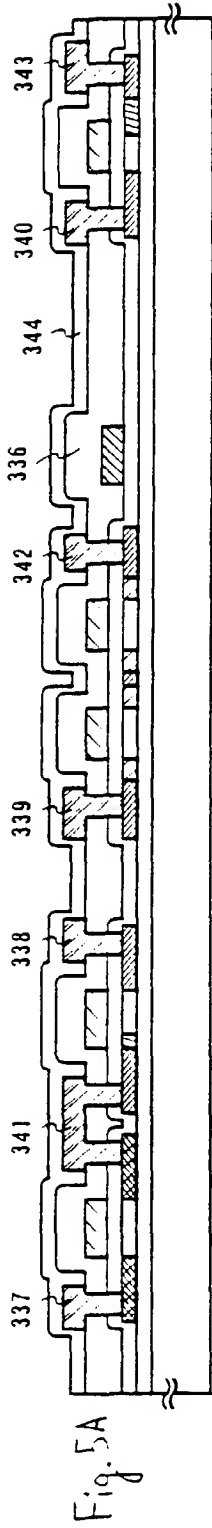
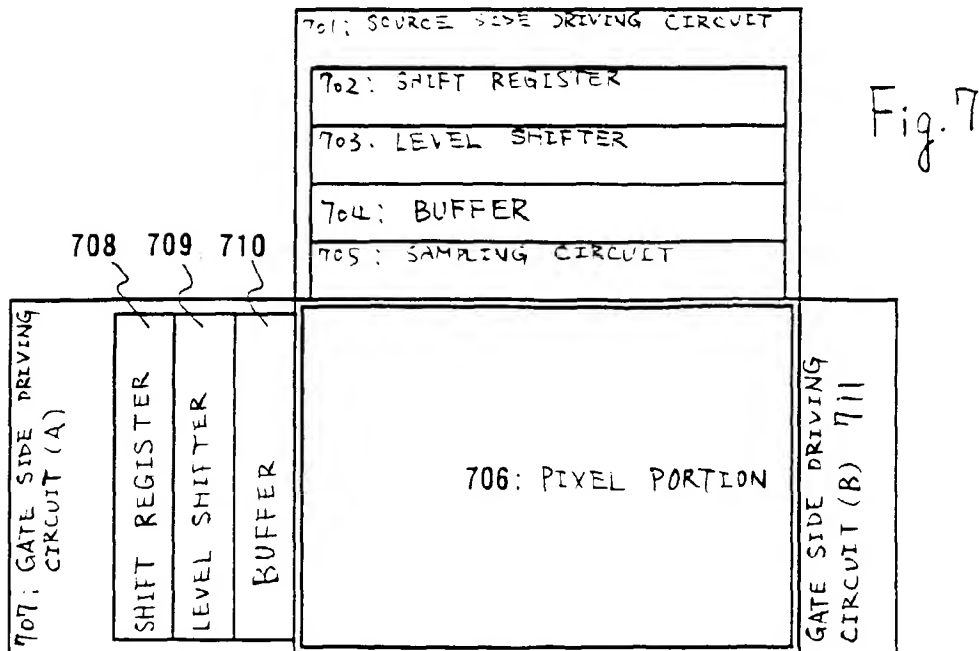
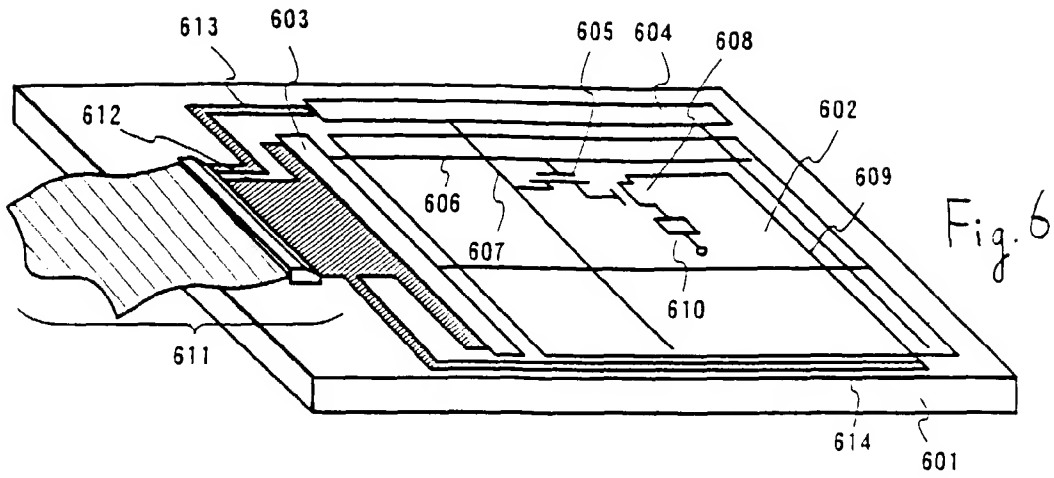
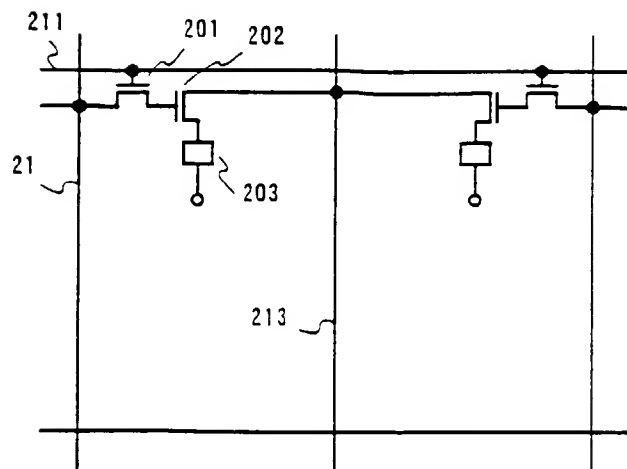
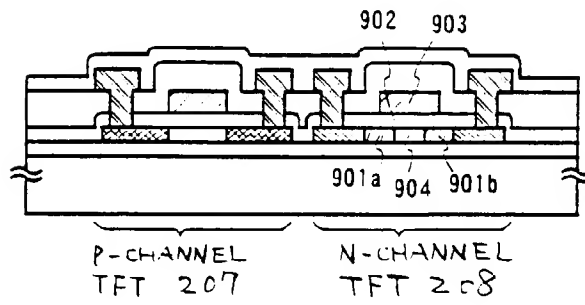
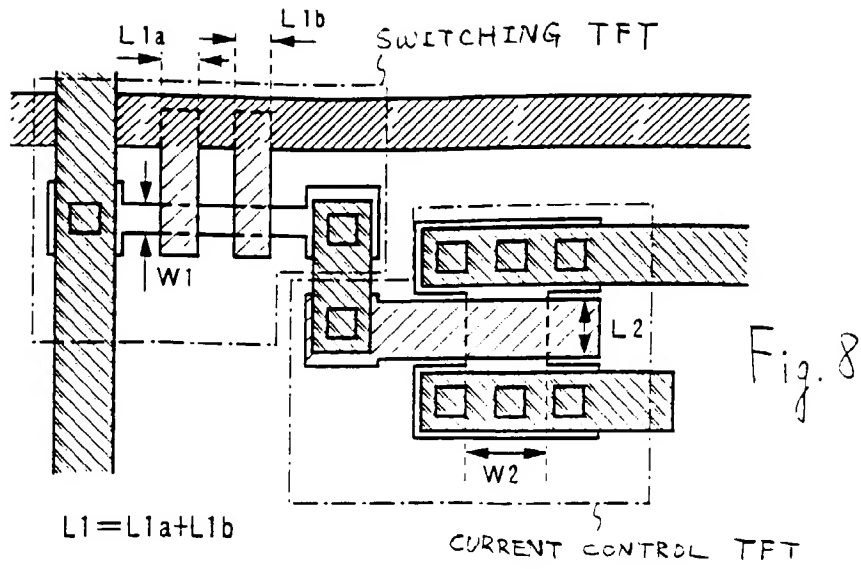


Fig. 4D









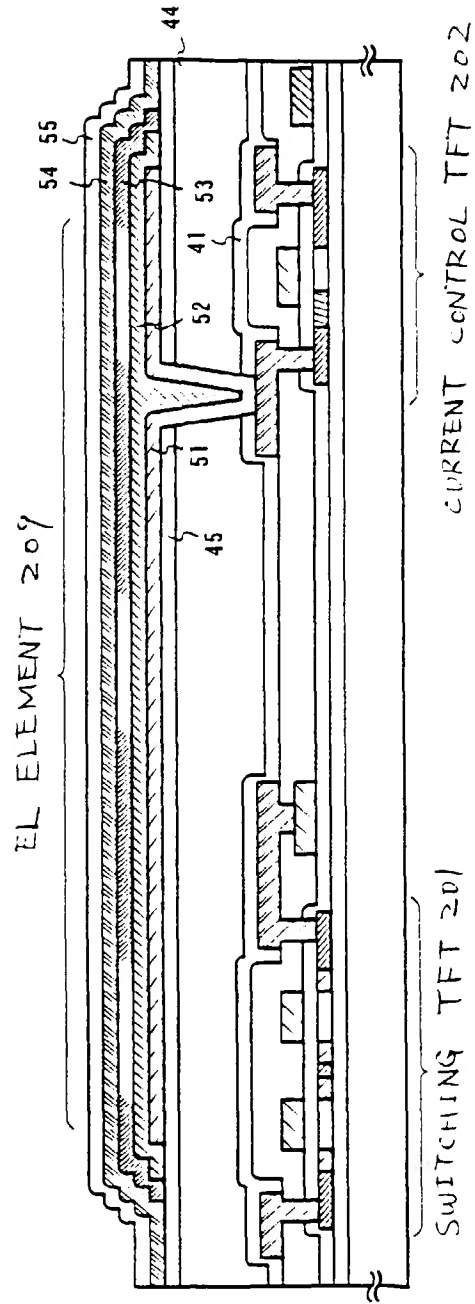


Fig. 11

Fig. 12A

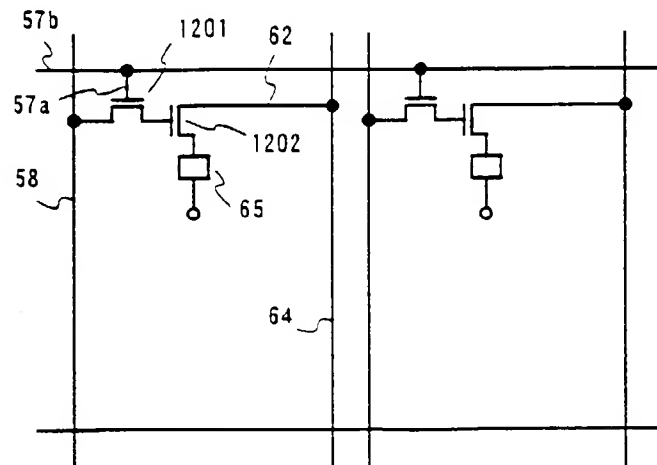
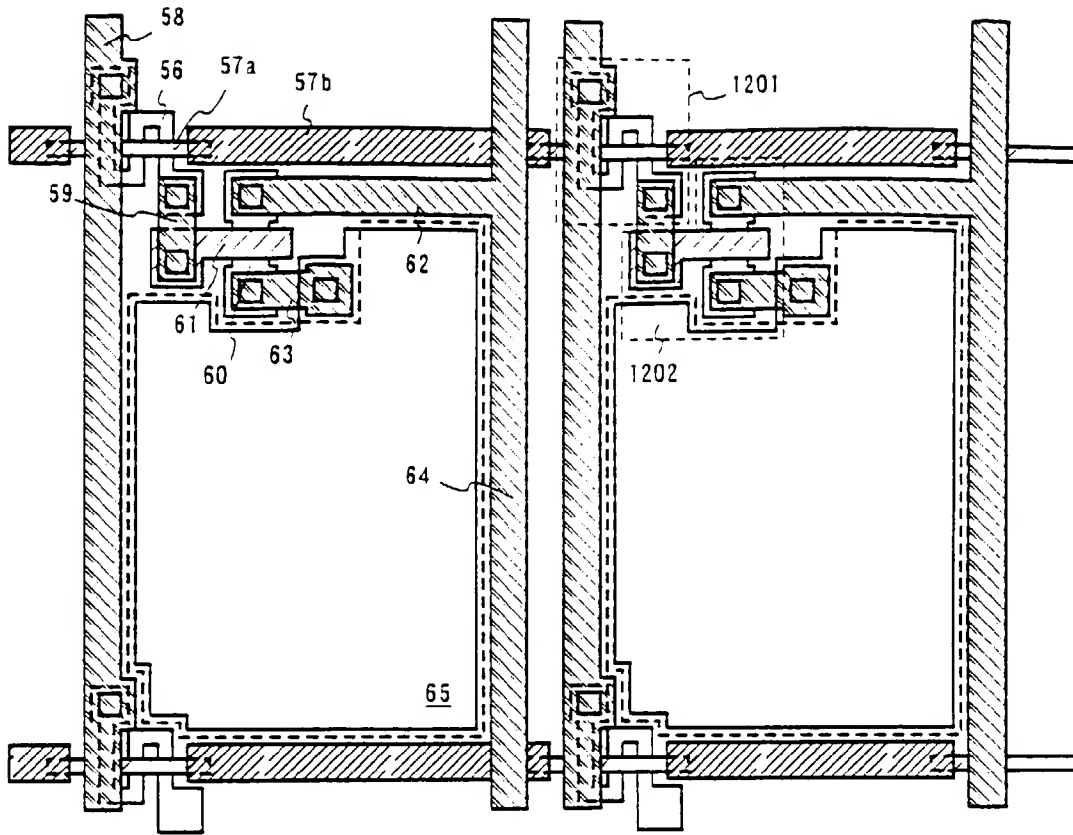


Fig. 12B

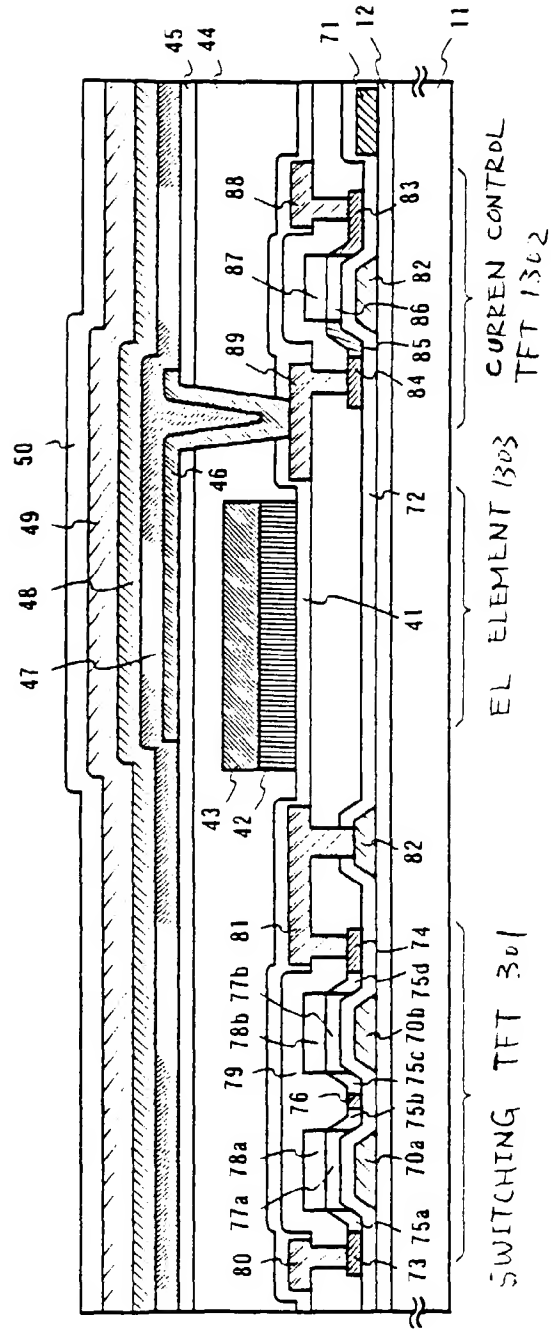


Fig. 13

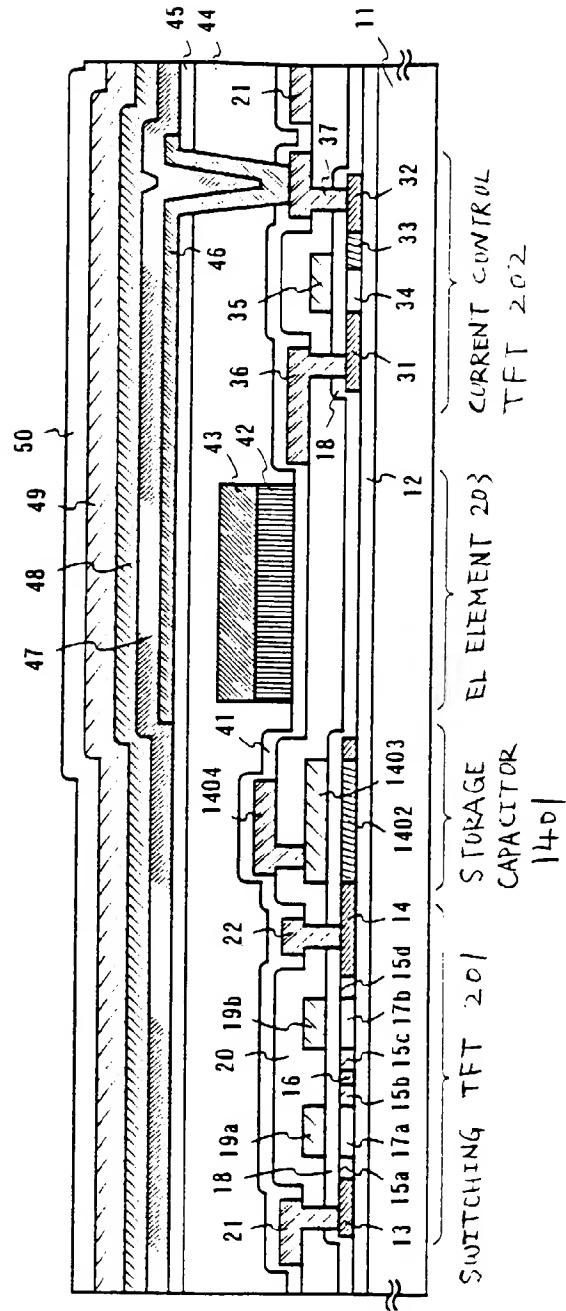


Fig. 14

Fig. 15A

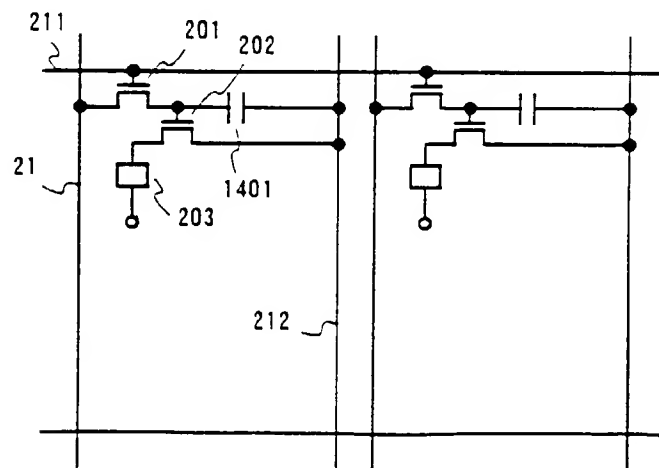
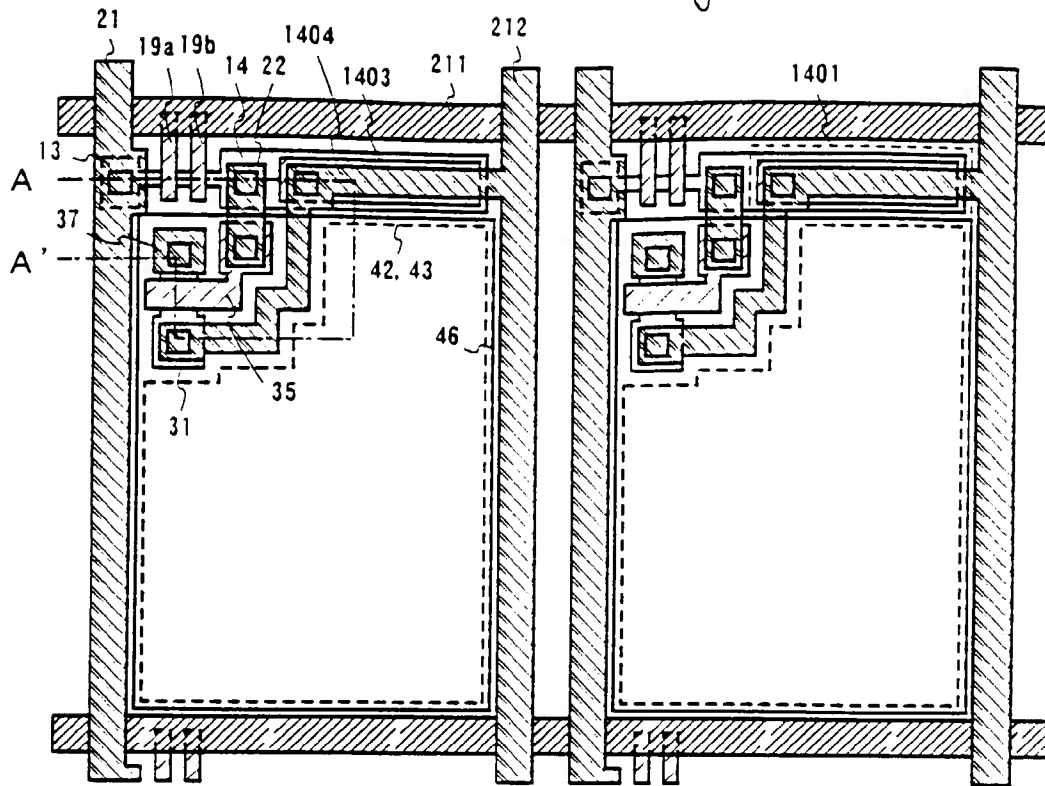
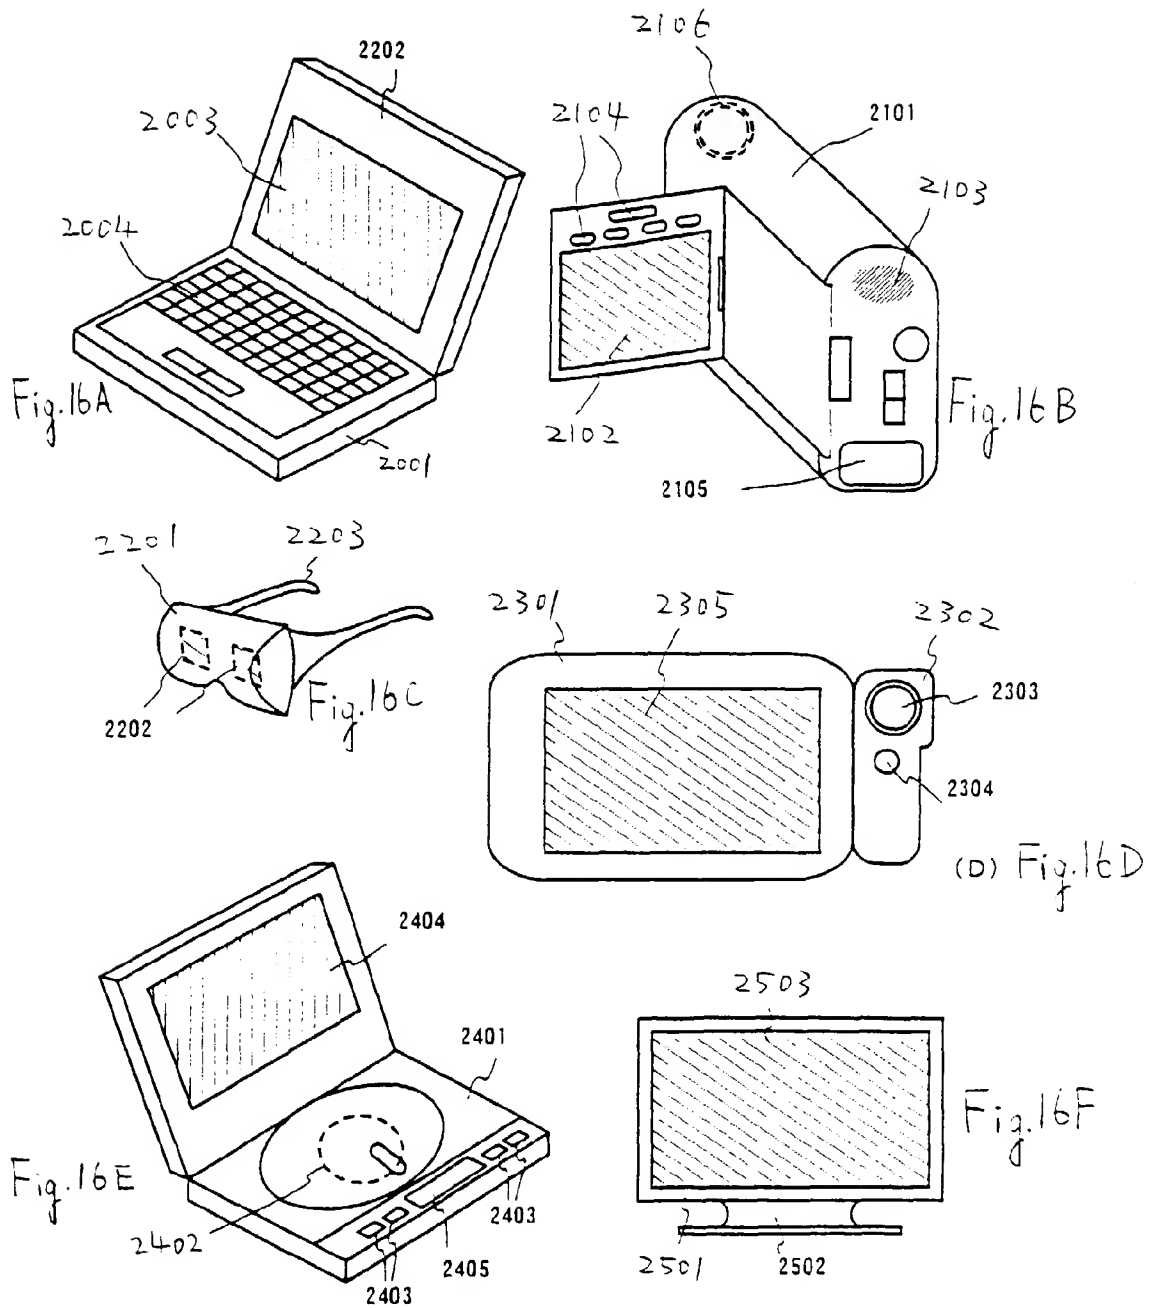


Fig. 15 B





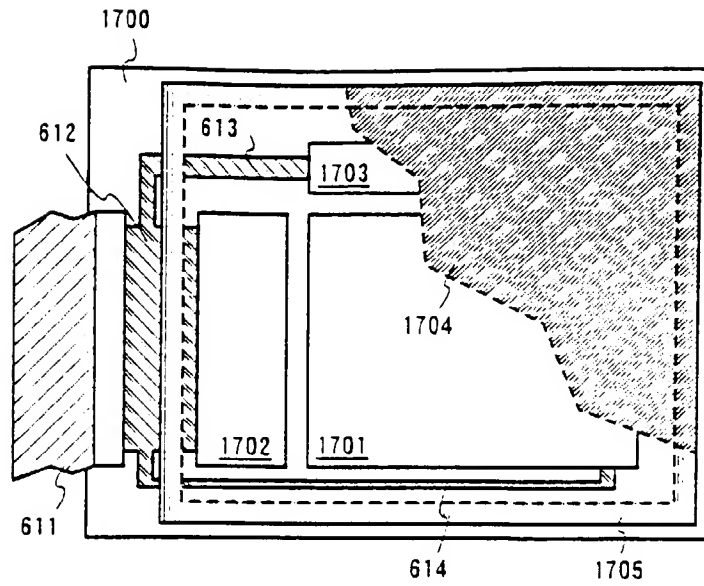


Fig. 17A

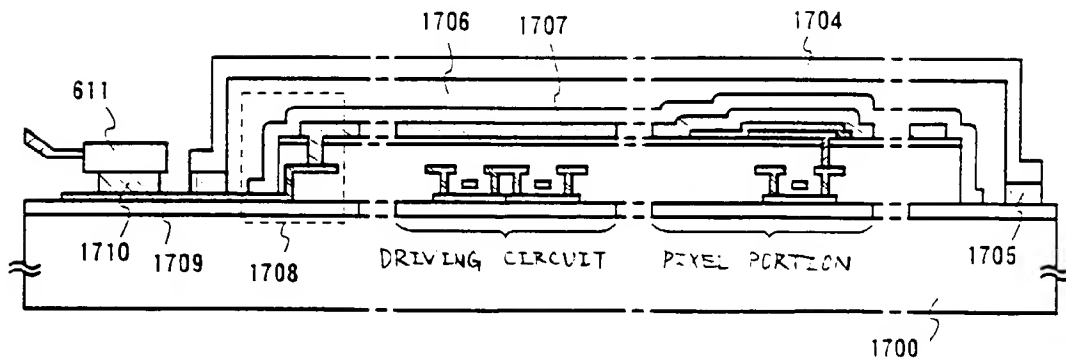


Fig. 17B

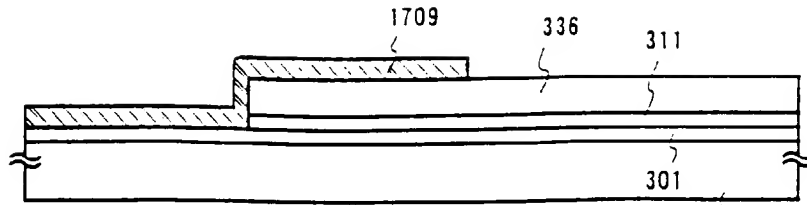


Fig. 18A

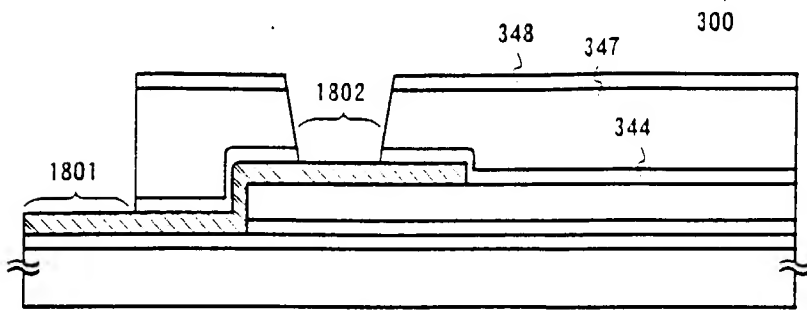


Fig. 18B

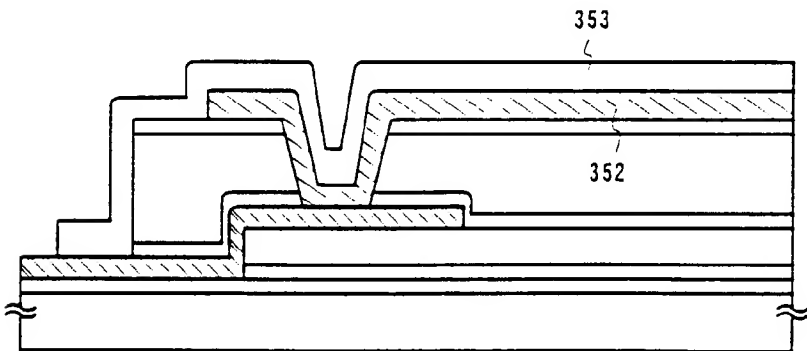


Fig. 18C

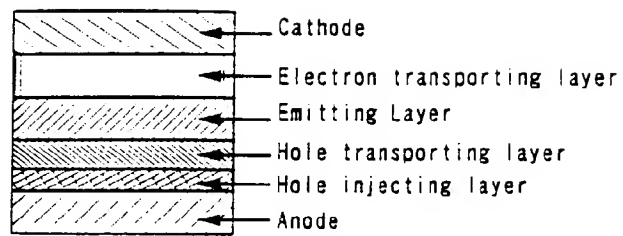
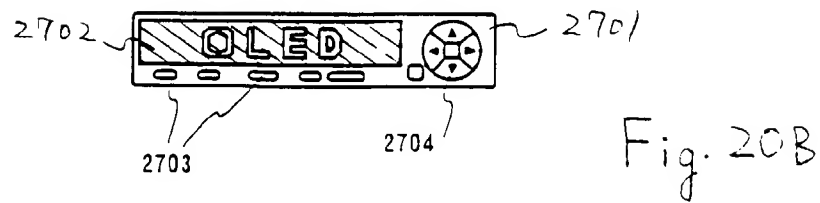
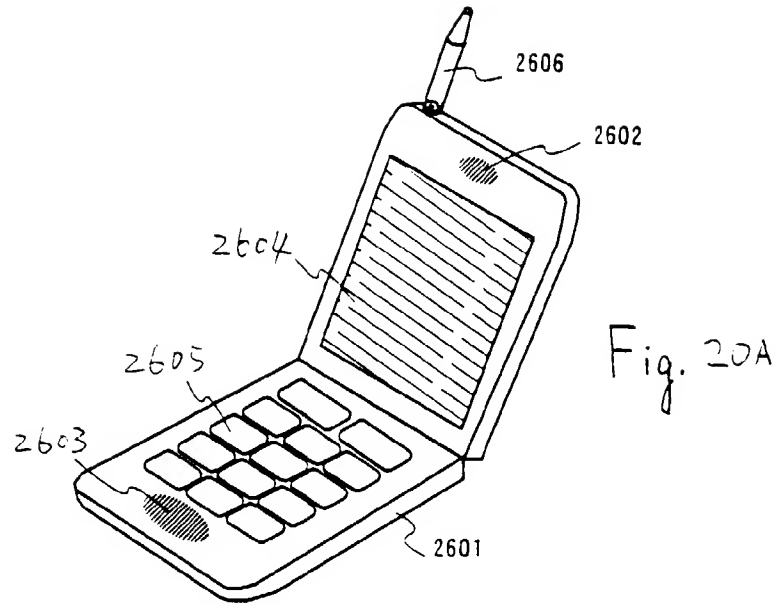


Fig. 19



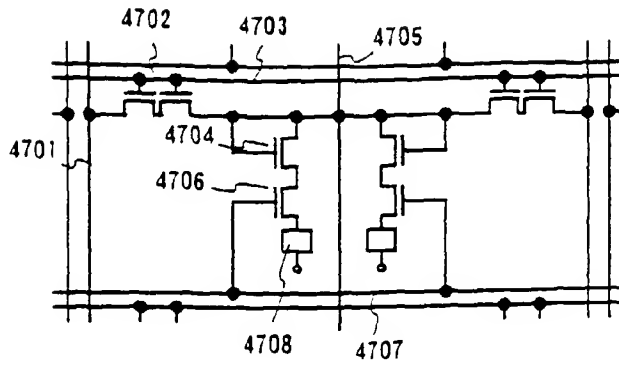


Fig. 21A

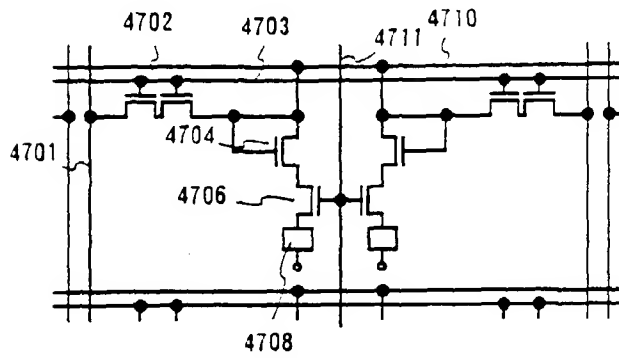


Fig. 21B

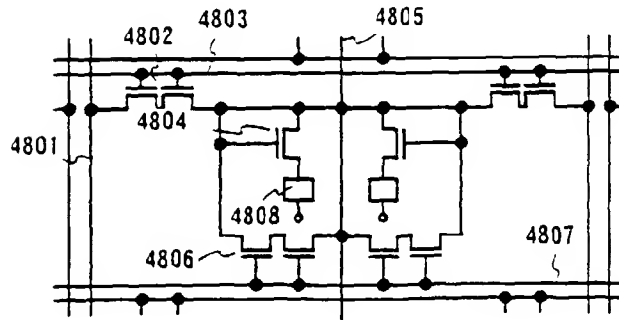


Fig. 22A

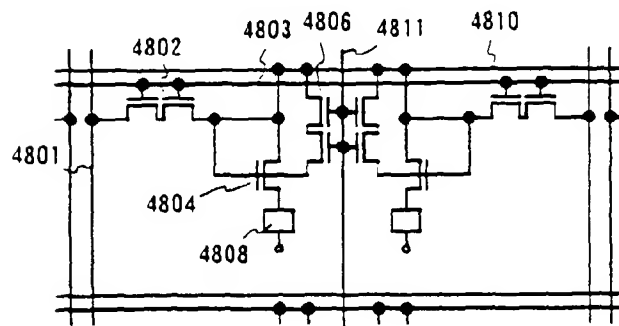


Fig. 22B

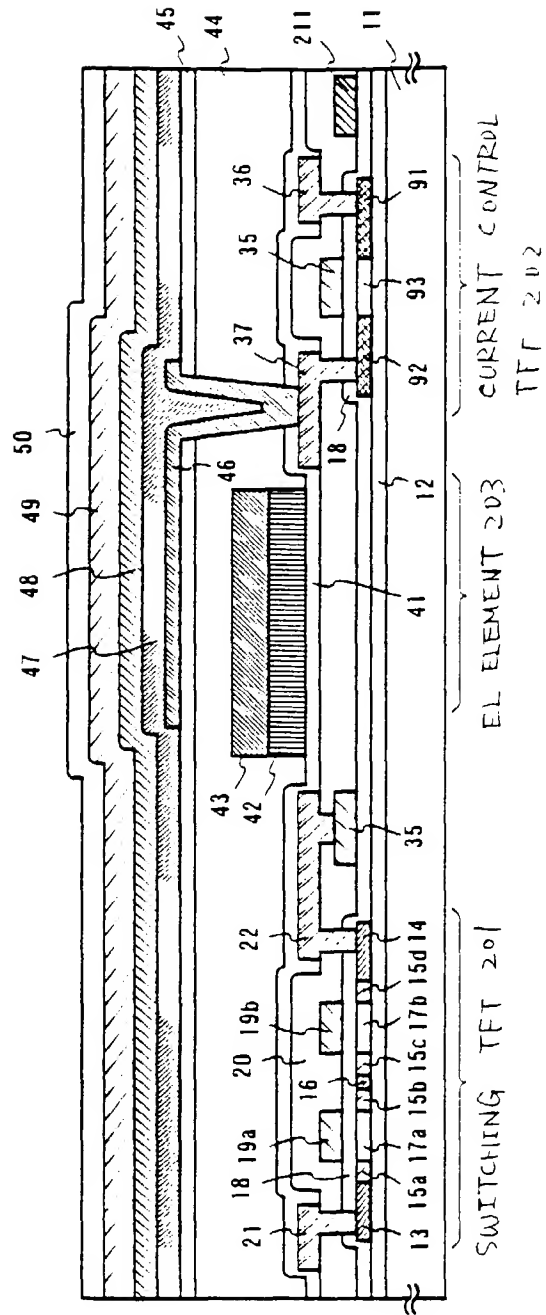


Fig. 23



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 00 11 2032

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 482 896 A (TANG CHING W) 9 January 1996 (1996-01-09)	1,6,29, 34,38, 43,47	H05B33/22 H01L27/15 H01L27/00
Y	* column 3, line 62 - column 4, line 17; figures 4,10 *	11-28, 39-42, 44-46, 48-59	
	---		
X	US 5 496 597 A (SOININEN ERKKI ET AL) 5 March 1996 (1996-03-05)	1,2,6-8, 29,30, 34-36	
Y	* column 1, line 42-56 *	39-42, 44-46	
	---		
A	US 5 552 668 A (HIROSE KOJI ET AL) 3 September 1996 (1996-09-03) * abstract *		
	---		
X	US 4 975 338 A (KAGEYAMA YOSHIYUKI ET AL) 4 December 1990 (1990-12-04) * column 3, line 4-12 *	1,2,6,7	
	---		
X	US 5 003 221 A (SHIMIZU YASUMOTO) 26 March 1991 (1991-03-26) * column 15, line 5-8 *	3,8,31, 36	H05B H01L G09G
	---		
X	US 5 853 905 A (SO FRANKY ET AL) 29 December 1998 (1998-12-29) * column 2, line 64 - column 3, line 11 *	4,5,9,10	
	---		
A	EP 0 491 521 A (FUJITSU LTD) 24 June 1992 (1992-06-24) * page 2, line 10-13 *	4,5	
	---		
Y	EP 0 717 445 A (EASTMAN KODAK CO) 19 June 1996 (1996-06-19) * abstract; figure 1 *	11-28, 48-59	
	---		
	-/--		
-The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 21 September 2000	Examiner Werner, A
<p>CATEGORY OF CITED DOCUMENTS</p> <p>X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document</p> <p>T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons</p> <p>&amp;: member of the same patent family, corresponding document</p>			

EPO FORM 1503 03/02 (P04C01)



European Patent  
Office

Application Number

EP 00 11 2032

### CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ Only part of the claims have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid, namely claim(s):
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

### LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

see sheet B

- ☐ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ As all searchable claims could be searched without effort justifying an additional fee, the Search Division did not invite payment of any additional fee.
- ☒ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid, namely claims:  
1-59
- ☐ None of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims, namely claims:





European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 00 11 2032

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	EP 0 684 753 A (NIPPON ELECTRIC CO) 29 November 1995 (1995-11-29) * figure 4 *	11-28, 48-59	
D,A	--- PATENT ABSTRACTS OF JAPAN vol. 1998, no. 12, 31 October 1998 (1998-10-31) & JP 10 189252 A (IDEMITSU KOSAN CO LTD), 21 July 1998 (1998-07-21) * abstract * -----	11-28, 48-59	
			TECHNICAL FIELDS SEARCHED (Int.Cl.7)
<del>The present search report has been drawn up for all claims</del>			
Place of search <b>MUNICH</b>		Date of completion of the search <b>21 September 2000</b>	Examiner <b>Werner, A</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons ..... &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1508 03 82 (P04C01)



European Patent  
Office

LACK OF UNITY OF INVENTION  
SHEET B

Application Number  
EP 00 11 2032

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims: 1,2,6,7,29,30,34,35,38,39,43,44,47

Electro-optical device with an EL element in contact with an insulating film including N and Si.

2. Claims: 1,2,6,7,29,30,34,35,38,39,43,44,47

Electro-optical device with an EL element in contact with an insulating film including N and Al.

3. Claims: 1,6,29,34,38,43

Electro-optical device with an EL element in contact with an insulating film including N and P.

4. Claims: 1,6,29,34,38,43,47

Electro-optical device with an EL element in contact with an insulating film including B and Al.

5. Claims: 1,6,29,34,38,43,47

Electro-optical device with an EL element in contact with an insulating film including B and Si.

6. Claims: 1,2,6,7,29,30,34,35,38,39,43,44,47

Electro-optical device with an EL element in contact with an insulating film including B and P.

7. Claims: 1,6,29,34,38,43,47

Electro-optical device with an EL element in contact with an insulating film including C and Al.

8. Claims: 1,2,6,7,29,30,34,35,38,39,43,44,47

Electro-optical device with an EL element in contact with an insulating film including C and Si.

9. Claims: 1,6,29,34,38,43,47

Electro-optical device with an EL element in contact with an insulating film including C and P.



European Patent  
Office

**LACK OF UNITY OF INVENTION  
SHEET B**

Application Number  
EP 00 11 2032

The Search Division considers that the present European patent application does not comply with the requirements of unity of invention and relates to several inventions or groups of inventions, namely:

10. Claims: 2,6,7,30,34,35,39,43,44

Electro-optical device with an EL element in contact with an insulating film including B and N.

11. Claims: 2,6,7,30,34,35,39,43,44

Electro-optical device with an EL element in contact with an insulating film including Al and O.

12. Claims: 3,8,31,36,40,45

Electro-optical device with and EL element in contact with an insulating film including Si,Al,N,O and a rare earth element.

13. Claims: 4,5,9,10,32,33,37,41,42,46

Electro-optical device with an EL element in contact with a carbon film.

14. Claims: 11-28,48-59

EL element with an insulating film and at least two TFTs.

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 11 2032

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

21-09-2000

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 5482896 A	09-01-1996	US 5530269 A	25-06-1996
US 5496597 A	05-03-1996	FI 92897 B	30-09-1994
		DE 4425507 A	26-01-1995
		JP 3024048 B	21-03-2000
		JP 7106065 A	21-04-1995
US 5552668 A	03-09-1996	JP 2657164 B	24-09-1997
		JP 7114988 A	02-05-1995
		JP 2657167 B	24-09-1997
		JP 8037089 A	06-02-1996
US 4975338 A	04-12-1990	JP 2103893 A	16-04-1990
		JP 2103894 A	16-04-1990
US 5003221 A	26-03-1991	JP 1194292 A	04-08-1989
US 5853905 A	29-12-1998	NONE	
EP 0491521 A	24-06-1992	JP 2579071 B	05-02-1997
		JP 4292497 A	16-10-1992
		JP 2545498 B	16-10-1996
		JP 4219337 A	10-08-1992
		DE 69125118 D	17-04-1997
		DE 69125118 T	19-06-1997
		US 5217700 A	08-06-1993
		US 5338364 A	16-08-1994
EP 0717445 A	19-06-1996	JP 8241048 A	17-09-1996
EP 0684753 A	29-11-1995	JP 2701738 B	21-01-1998
		JP 7312290 A	28-11-1995
		DE 69507196 D	25-02-1999
		DE 69507196 T	12-08-1999
		US 5747930 A	05-05-1998
JP 10189252 A	21-07-1998	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82